




CROWN PlayCASTLE

Tips for Safe & Joyful Play

Welcome to a world of adventures. Your child's safety always comes first and by following these simple guidelines, you can create a joyful, safe play space.

- Before starting, refer to the "Location Selection Guide" to choose the perfect spot to install your Crown PlayCASTLE. Make sure product is placed on a level surface to guarantee safety, proper function and durability.
- Crown PlayCASTLE is designed for an adult-only assembly to ensure every piece is fitted with precision. Keep all the parts out of the reach of children until the product is fully assembled.
- To protect the parts from scratches, assemble the product on a non-abrasive surface.
- Packaging materials are not safe to play with and should be kept away from children.
- Before each play session, take a few minutes to confirm that all the fasteners are firmly tightened and all the parts are securely fastened. Make sure the play area is free of sharp objects, debris or other potential hazards that may cause injuries.
- Teach your child to sit upright and go down feet-first on the slide. Climbing up the side, sliding down headfirst or in the standing position can be fatal and should be avoided at all costs. Additionally, parents should discourage their children from jumping off the slide seat.
- Do not attach any external ropes, chains, or accessories not supplied with the Crown PlayCASTLE, as these may interfere with the normal functioning of the product.
- Only one child on the slide is recommended at a time. Children should wait until the landing area is completely clear before going down the slide.
- The product is intended for use by kids over 2 years of age and has a play capacity of up to 8 children at a time. Never exceed the user limit.
- While assembling the Crown PlayCASTLE, do not overtighten the bolts as this may cause damage to the parts.
- Adult supervision is recommended at all times to promote safe play and provide immediate assistance (when required).
- Regularly wipe the product with a clean, dry cloth regularly and avoid using harsh chemicals. For detailed care instructions, refer to the "Operation and Maintenance Guide" provided with the product.

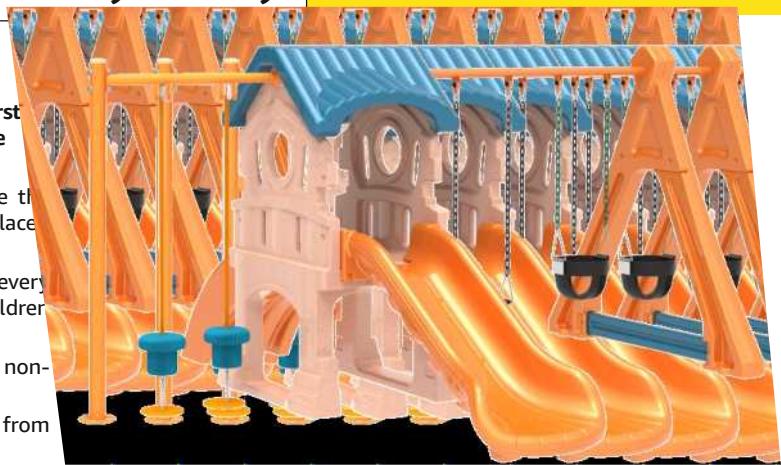

Part Details




Small Castle Side Panel x 2



Small Platform x 1



Stair x 1



Roof x 2

List of Parts	No.
Small Castle Side Panel	2
Stair	1
Small Platform	1
Slide	1
Small Castle Roof	2
Allen Key	1
T Handle	1
Swing Leg	2
Swing Leg Support	1
Big End Plate	1
Small End Plate	2
Swing Bar	1
Bucket Swing	1
Flap Swing	1
Vertical Support Bar	1
Balancing Stone Bar	1
Balancing Stone Rod	2
Pile Cluster	2
Washer	40
Nut Cap Base	41 (8 Spare)
Nut Cap	41 (8 Spare)
Nut	12
Allen Bolt (20mm)	3
Allen Bolt (30mm)	3
Allen Bolt (40mm)	4
Allen Bolt (50mm)	4
Allen Bolt (60mm)	4
Allen Bolt (70mm)	4
Allen Bolt (80mm)	2
Allen Bolt (110mm)	2
Allen Bolt (150mm)	2
Installation Manual	1
Anchor Fastener	15

Assembly requires a minimum of 2 people. Have a third person assist when necessary.

Model No: CRPC

**2+
YEARS**



Customer Support



Assembly Video

Before starting the assembly, please ensure that the part quantity matches the numbers listed in the manual. If you find any discrepancies in the part count or encounter any product-related issues, feel free to reach out to us at +918221001033 or connect with us via WhatsApp in between 9:30-6PM, Monday to Saturday. We're here to assist you!

DISCLAIMER: Actual product color may vary slightly from what is shown in the image.



Nut Cap Base
x 41 (8 Spare)



Nut Cap x 41 (8
Spare)



Washer x 40




Nut x 12



Allen Bolt (30mm)
x 3



Allen Bolt (40mm)
x 4

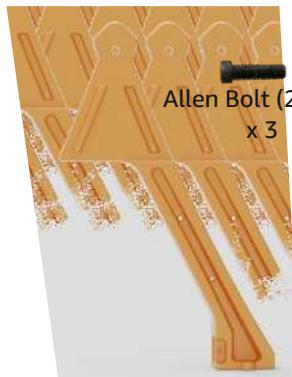

Swing leg x 2



Allen Bolt (50mm)
x 4



Allen Bolt (60mm)
x 4



Allen Bolt (70mm)
x 4



Allen Bolt (80mm)
x 2



Allen Bolt (110mm)
x 2



Bolt (150mm) x 2



Allen Key x 1



Small End Plate x 2



Swing Leg Support
x 1




Swing Bar x 1



Big End Plate x 1



Bucket Swing x 1



Flap Swing x 1




Balancing Stone
Bar x 2



Vertical Support
Bar x 1



Pile Cluster x 2

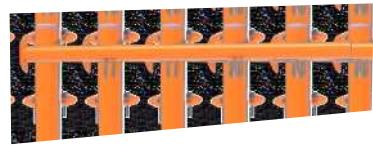

Anchor Fastener x
15



Instruction Manual
x 1



WARNING

Anchoring the PlayCASTLE (Mandatory)

For enhanced stability and safety, OK Play recommends anchoring the Play Castle to the floor. PlayCASTLE may also be used without anchoring but securing it to the floor will minimize movement during play.


To secure the PlayCASTLE to the floor:

1. Drill holes in the floor at the positions where the play castle is to be anchored.
2. Position the play set at the desired location, aligning pre-drilled holes on the base of both side panels with the drilled holes.
3. Insert an anchor fastener (provided in the packaging) through each of the two holes on both small castle side panels, making sure each anchor fastener passes directly into the corresponding drilled hole on the floor.
4. Tighten the anchor fasteners firmly to secure the side panels to the floor.

Repeat the above mentioned steps to anchor the swing legs (one anchor fastener for each swing leg), vertical support bar (three anchor fasteners) and balancing stones set base plates (three anchor fasteners for each balancing stone set plate) to the floor. Once completed, the play set will be anchored securely, minimizing movement during use.

Bolt Size Identification

To identify the bolt size, place it on the printed image and match the length of the bolt threaded shaft with the illustration.



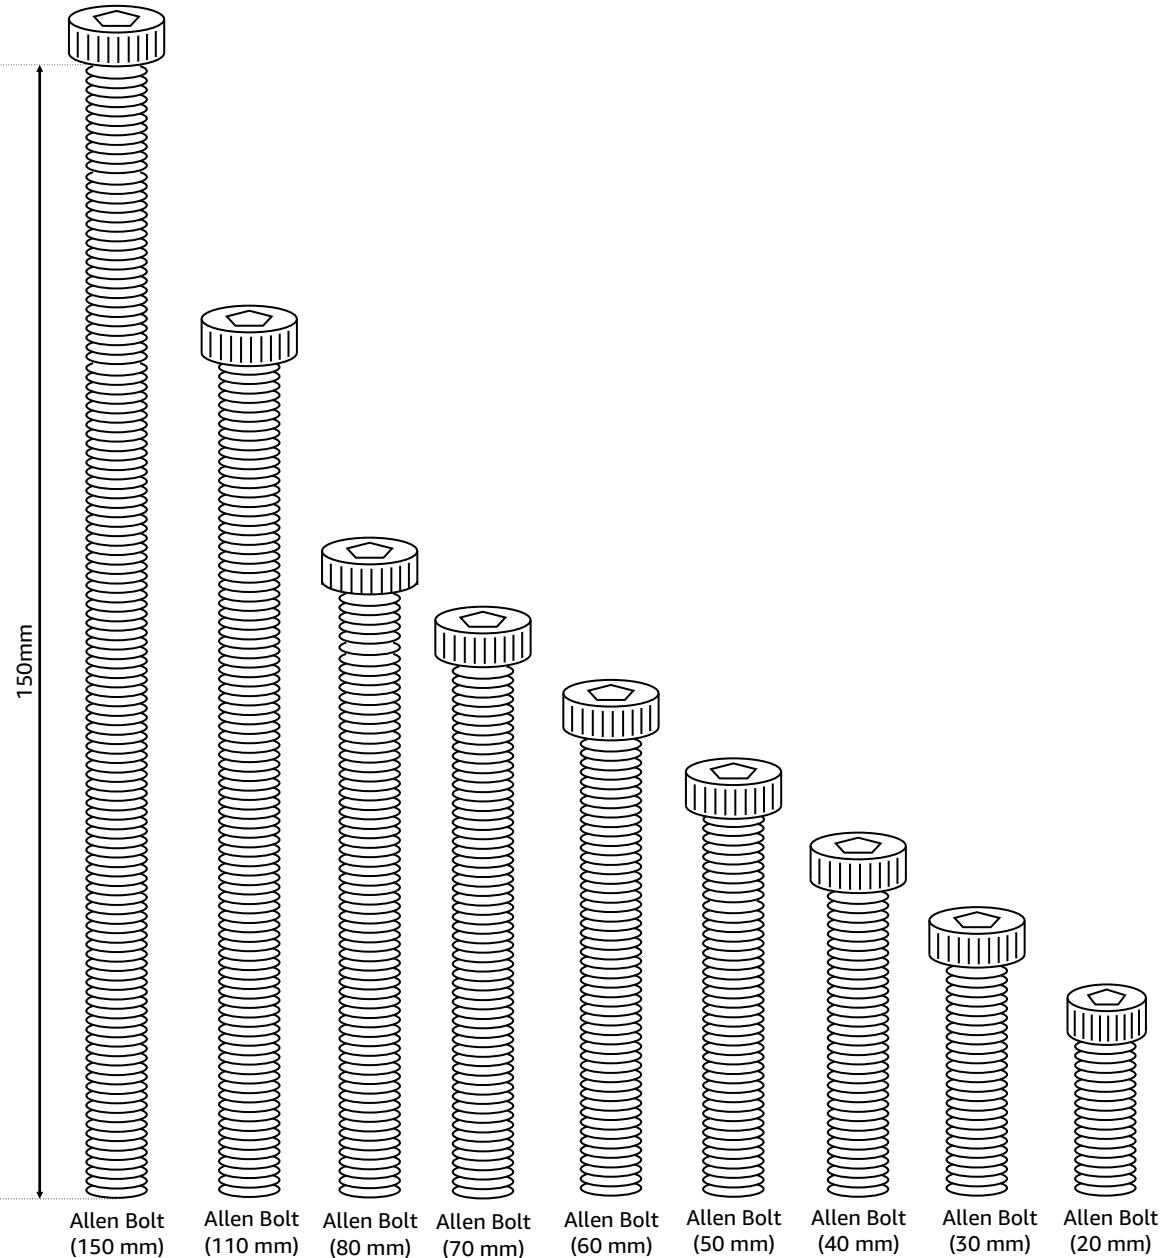


1

Assembly Instructions

STEP

Required Assembly Parts



Assemble the PlayCASTLE on a soft, non-abrasive surface to protect it from scratches.





Place the two small castle side panels upright on a flat, stable surface, making sure they are parallel to each other and at an appropriate distance apart.



Position the small platform between the side panels making sure the grooves on the underside of the small platform align with the tabs on the inner side of the side panels. Carefully move the platform downward so it fits securely between the small castle side panels.



60mm Allen Bolt (with washer)

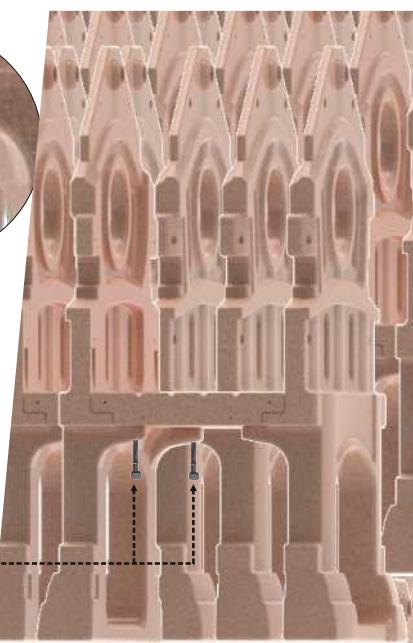


A. Take four 60 mm allen bolts and put a washer onto each.

B. From underneath the subassembly, insert one 60mm allen bolt (with washer in place) into each of the four aligned hole pairs of the small castle side panels and the small platform.

Tighten all the allen bolts one by one with the allen key.



Place one small roof on top of the assembled small panels as shown in the image above.

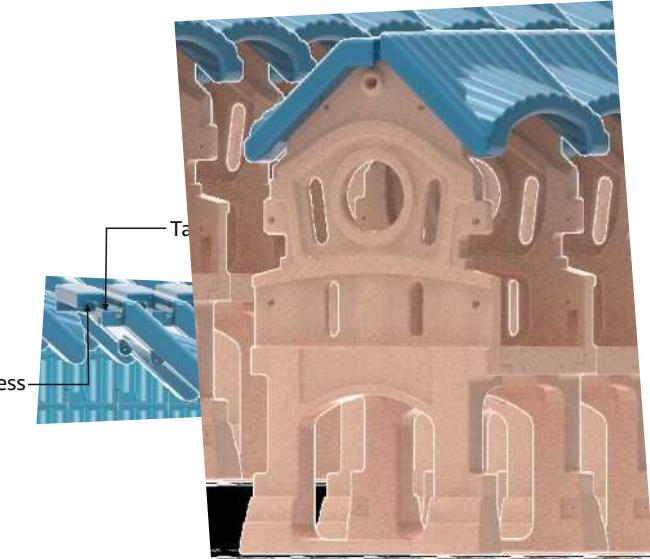


Take the other small roof and repeat the steps for the side panels, making sure the top edges of both small roofs are aligned.




Interlock the two small roofs together by inserting the tab of one small roof into the corresponding recess of the other. Adjust the roofs, if needed, so they fit properly.


Note: Make sure the top edges of the small castle side panels fit into the grooves on the underside of the assembled roof panel.

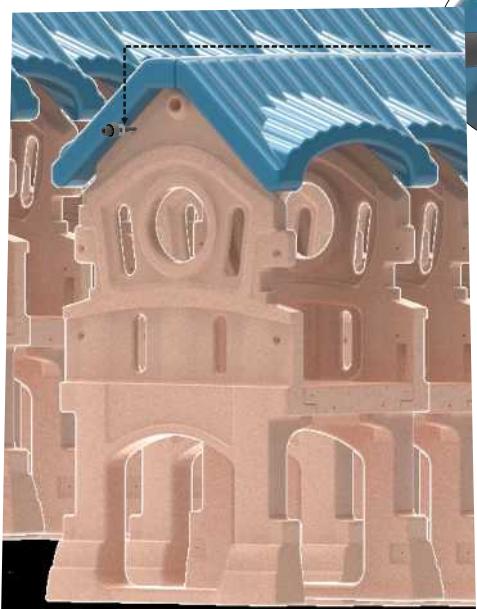


Put a washer first and then a nut cap base onto a 70mm allen bolt and insert the bolt (with the washer and the nut cap base in place) through the aligned holes of the roof panel and the side panel. The threaded end of the allen bolt protrudes from the other side



Allen bolt (70mm) with a washer and a nut cap

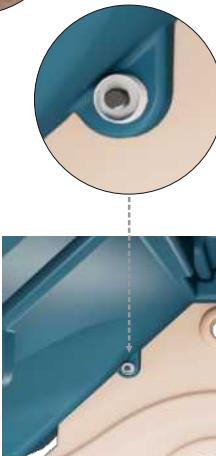


Nut Cap Base and Washer

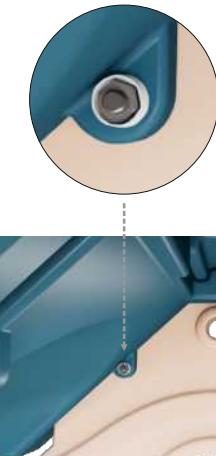

Nut


From inside the subassembly, place a nut cap base and a washer onto the allen bolt (inserted in the previous step) from the bolt end.

Take a nut and put it onto the allen bolt.

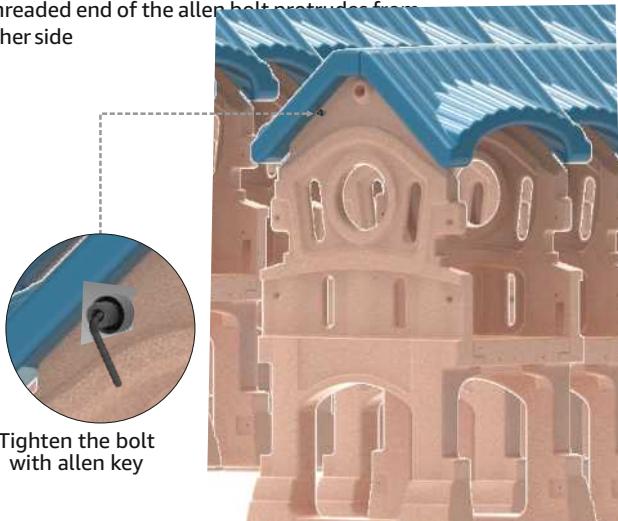


Tighten the bolt with allen key

From outside the subassembly, tighten the allen bolt with the allen key provided in the packaging. Use the T-handle to hold the nut stationary while tightening the allen bolt.

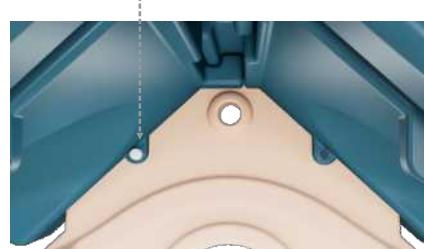


Place the nut cap onto the bolt end and press it firmly until it fits securely in place.


From outside the subassembly, fit a nut cap onto the bolt head.

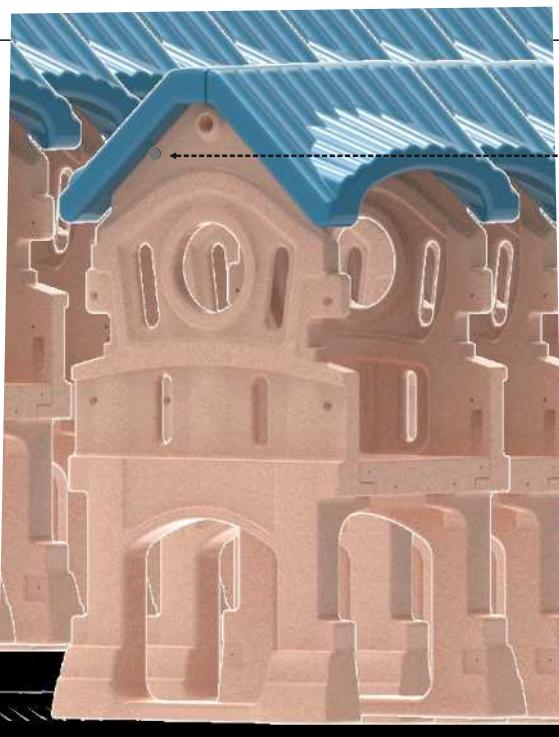

Nut Cap

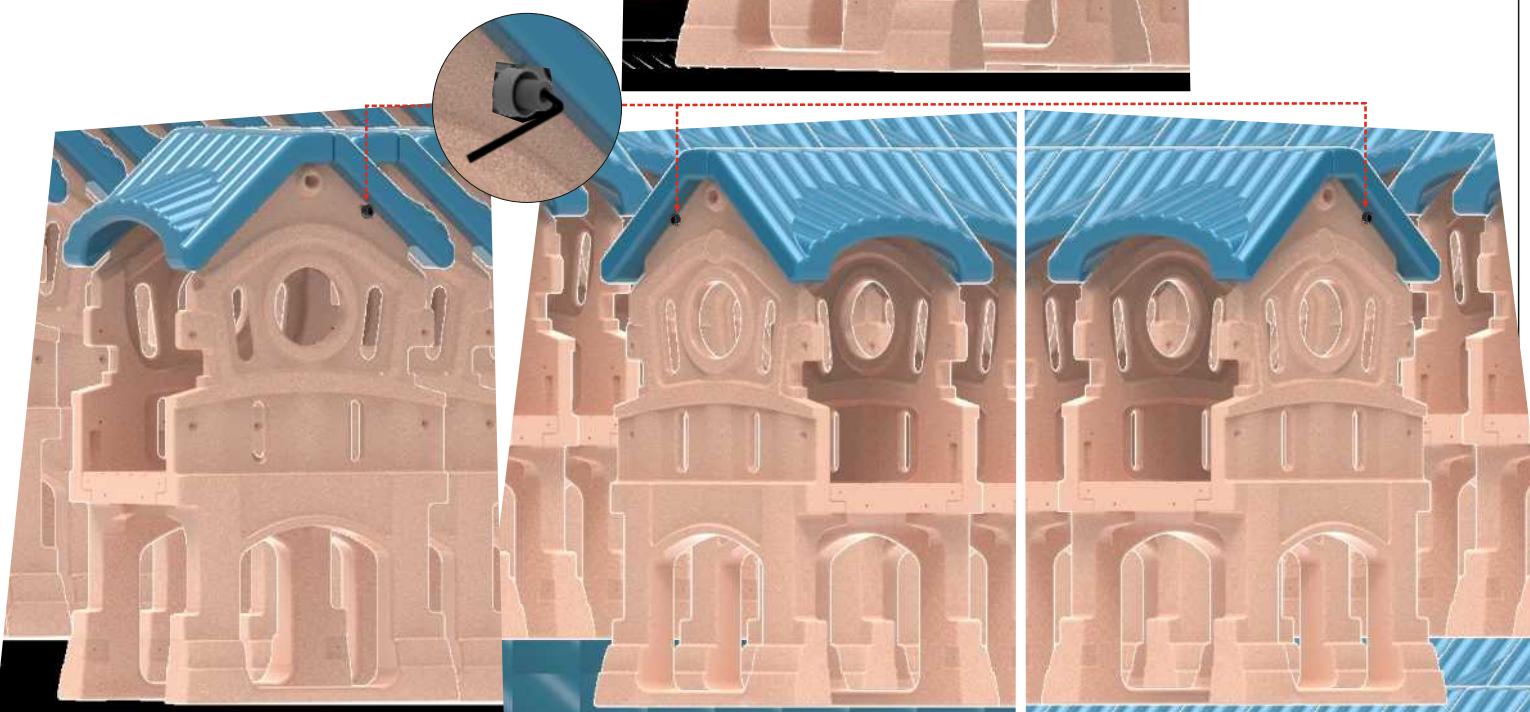


Repeat the above steps to insert one 70 mm allen bolts, fitted with a washer, through each of the remaining three aligned holes of the small castle side panel and the roof. For each allen bolt, use two nut cap bases, two washers, a nut and then tighten the bolt with the allen key as mentioned in the sequence of actions in this step. **Once tightened, put a nut cap onto the head and the end of each bolt.**

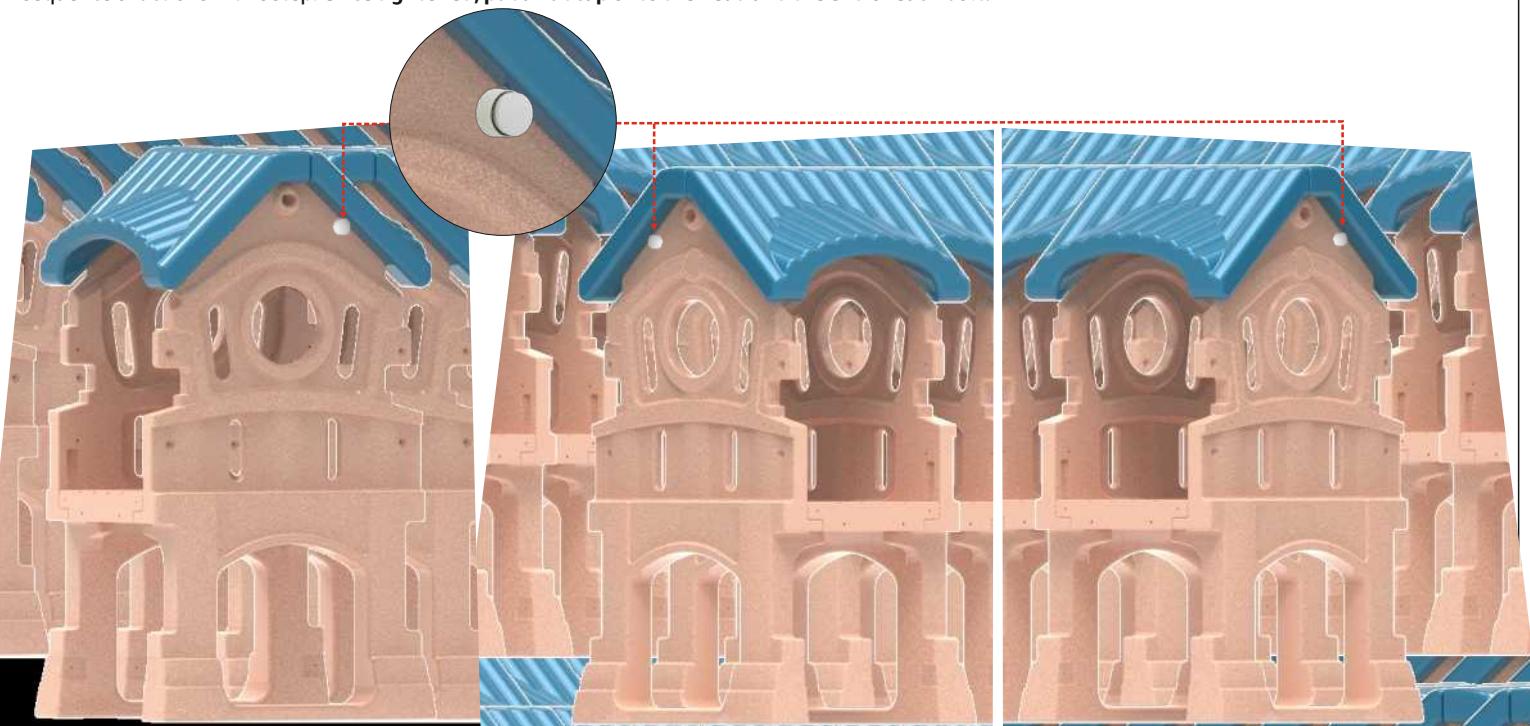

2

STEP

Required Assembly Parts



Subassembly (Step 7)



Slide x 1



Washer x 4



Nut Cap Base x 4




Allen Bolt (40mm) x 4





Allen Key x 1



Nut Cap x 4

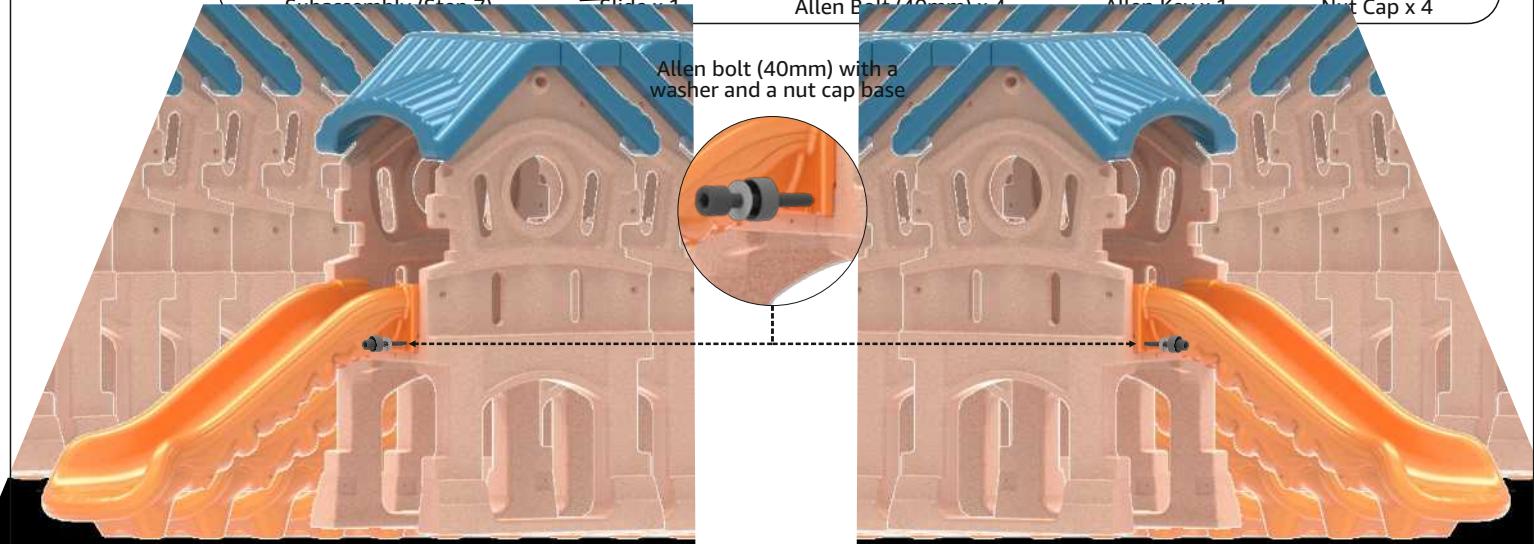


Take the slide and fasten it to the subassembly (step 7) by tightening the four allen bolts (40mm), each with a washer and a nut cap base, with the allen key. Put a nut cap each

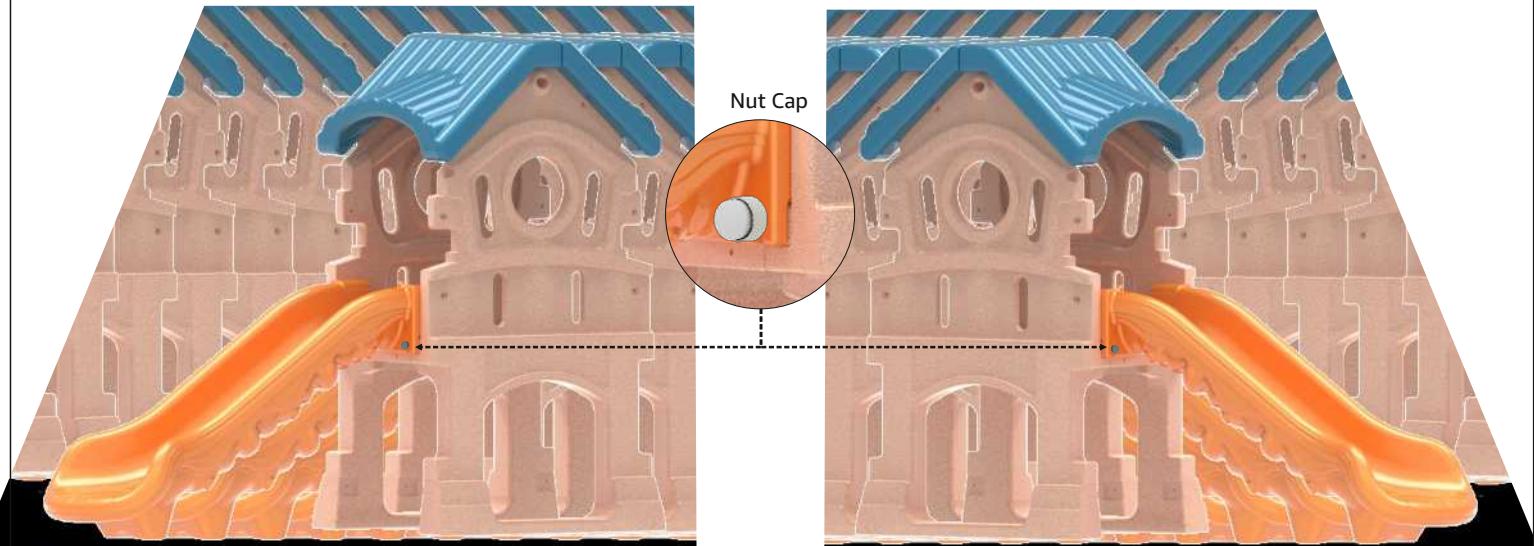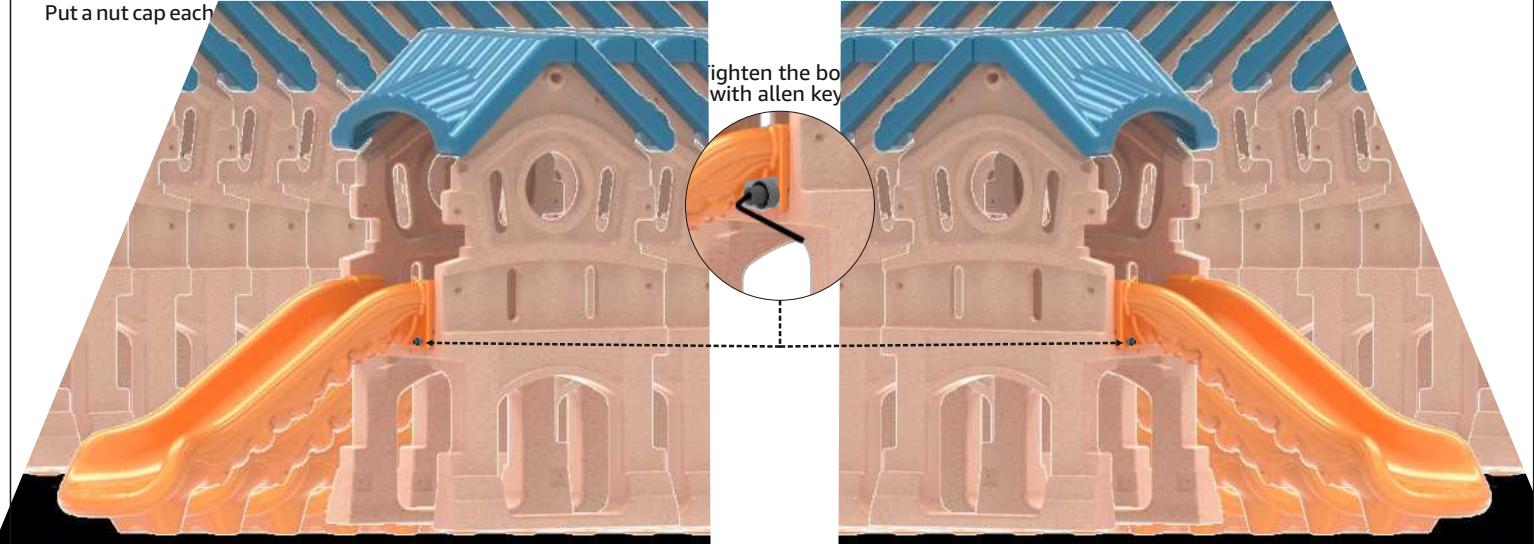

Nut Cap



3
STEP

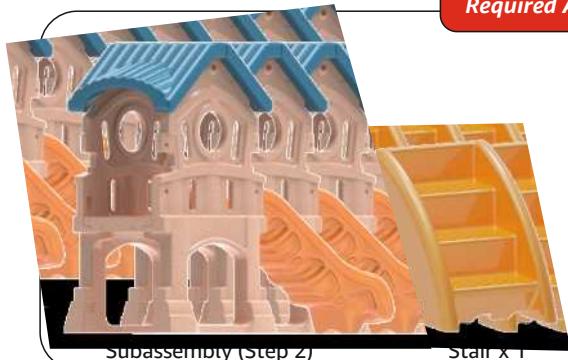

Required Assembly Parts



Washer x 2



Allen Key x 1



Allen Bolt (50mm) x 2




Nut Cap x 2




Nut Cap Base x 2




Align the holes at the top of the stair with the corresponding holes on the platform.

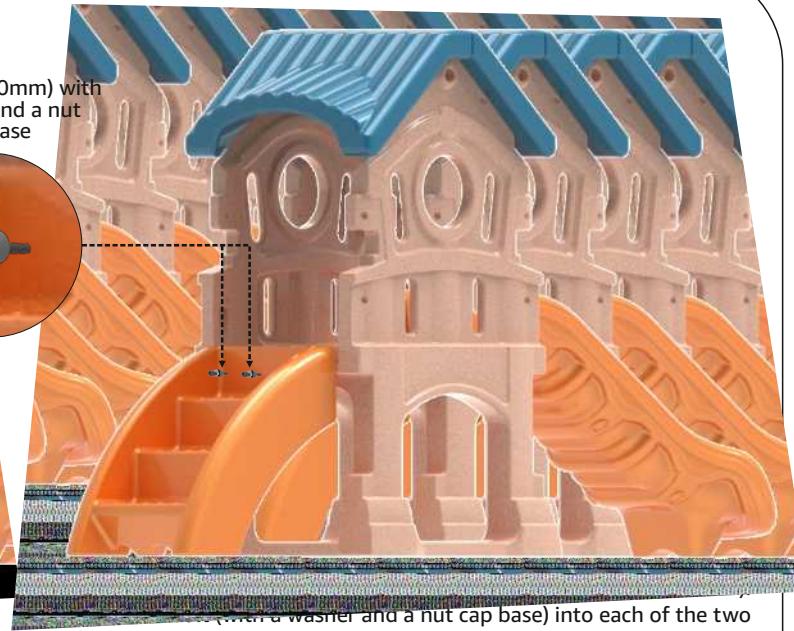

Insert the Allen bolts (with a washer and a nut cap base) into each of the two pairs of the aligned holes.

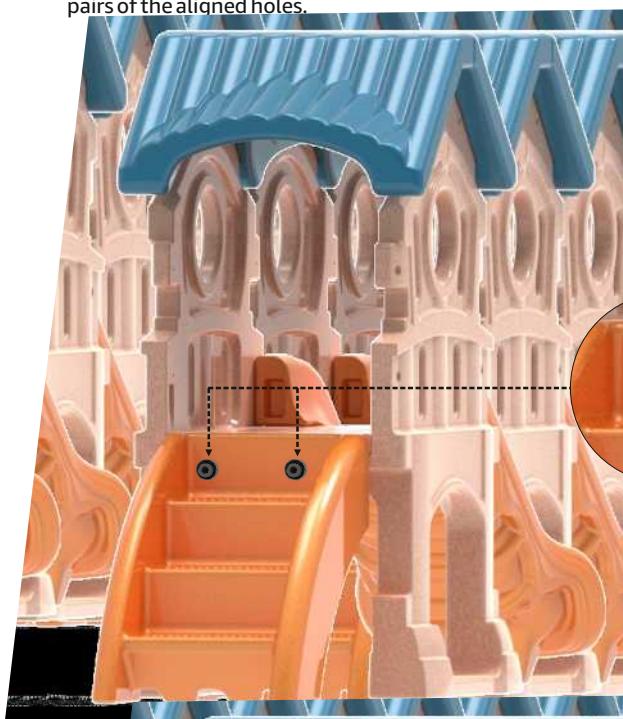

Tighten both the allen bolts one by one with the allen key.

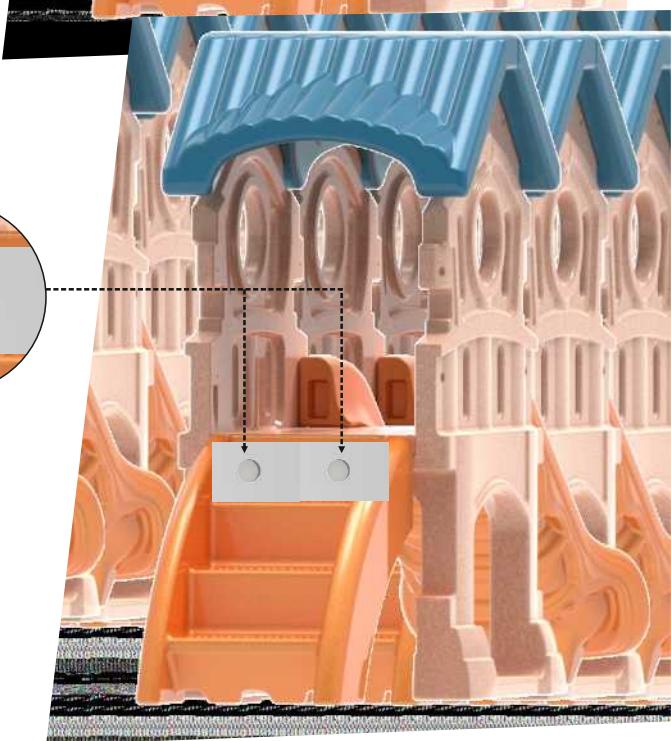


Put a nut cap each onto both the allen bolts.

4

STEP

Required Assembly Parts



Nut Cap x 8



Nut x 4



Allen Key x 1



T-Handle x 1



Swing Leg Support x 1





Washer x 8



Allen Bolt (150mm) x 2



Nut Cap Base x 8

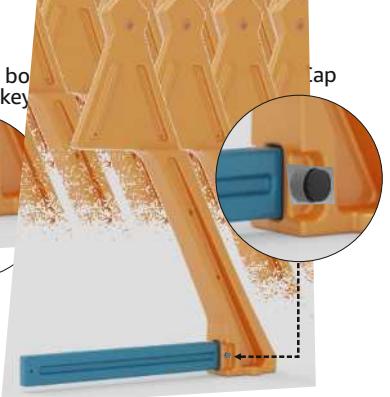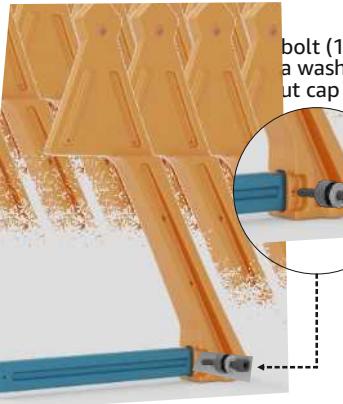

A. Take a swing leg and the swing leg support. Slide one end of the swing leg support into the designated slot at the bottom of the swing leg as shown in the images above.

B. Take one 110mm allen bolt, and put a washer and a nut cap base onto it.

C. Insert the bolt (with washer and nut cap base) through the bottom aligned holes of the swing leg and the swing leg support as shown in the image above. The threaded end of the bolt protrudes from the other side.


D. From the protruding end of the bolt, place a nut cap base first, then a washer followed by a nut.

E. Tighten the allen bolt with the allen key.

Note: Use the T-handle to keep the nut stationary when you tighten the bolt.

Fix a nut cap each onto the head and the threaded end of the bolt.


Use the above mentioned steps to attach the other swing leg to the swing leg support.

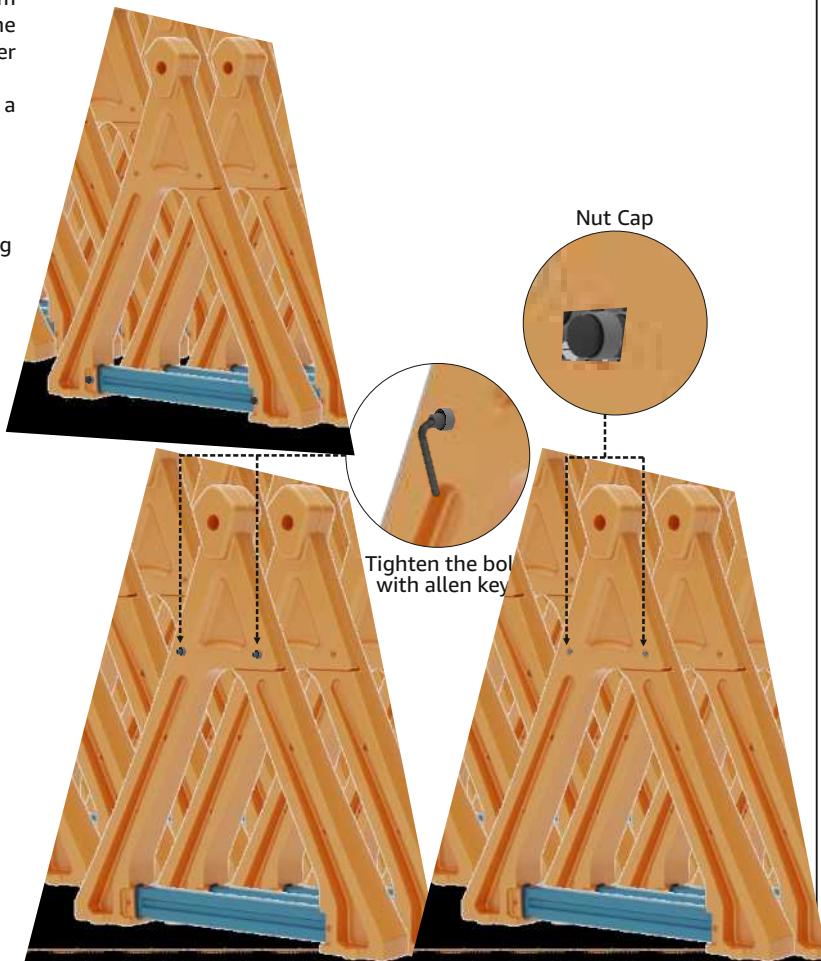


5

STEP



Required Assembly Parts

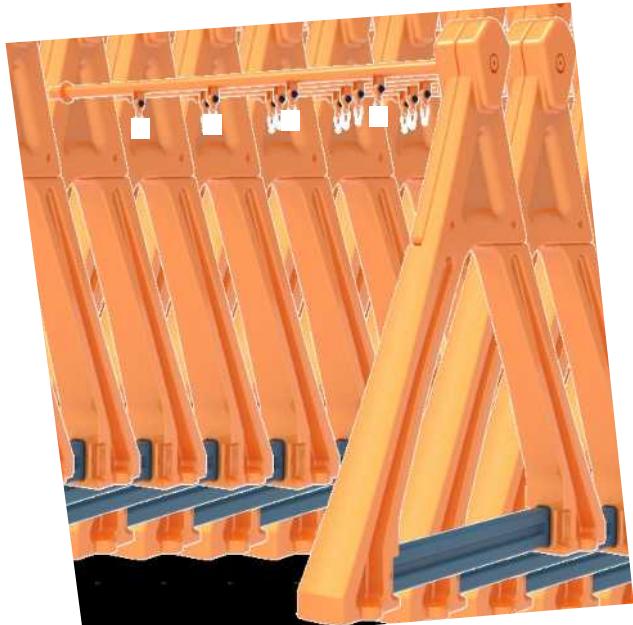

Take the swing bar and insert its one end into the hole at the top of the assembled swing legs (subassembly-step 4). Slide the bar through until its stop ring comes into contact with the top portion of the swing legs.

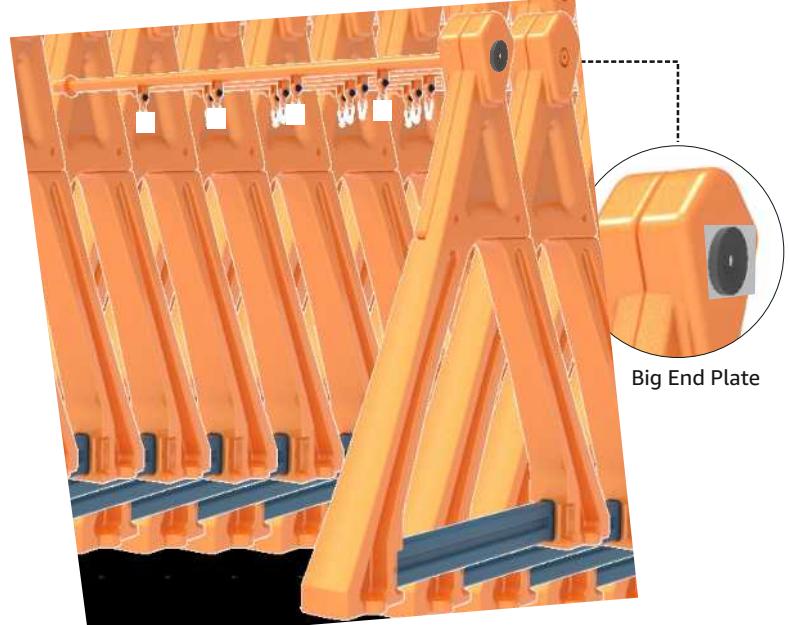


Take one big end plate, align the hole at its centre with the hole at the end of the swing bar (on the swing leg side).

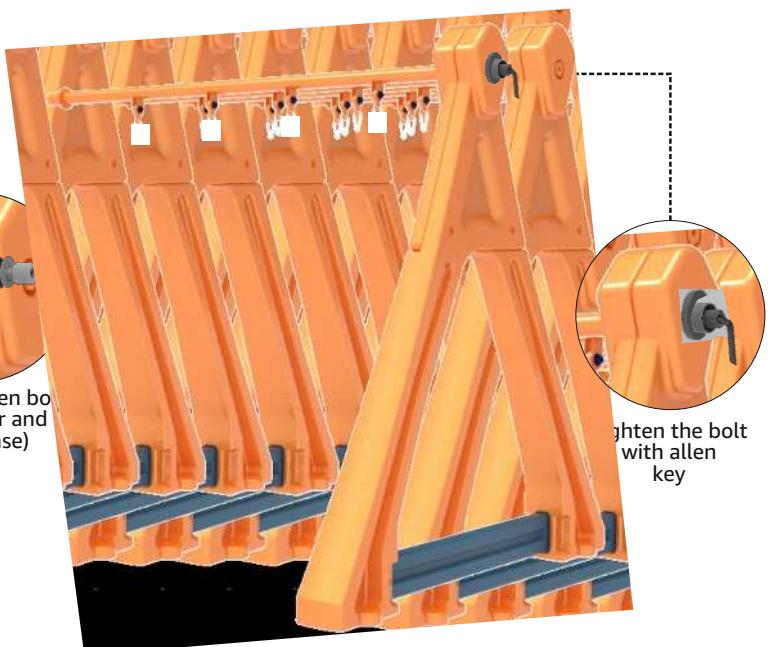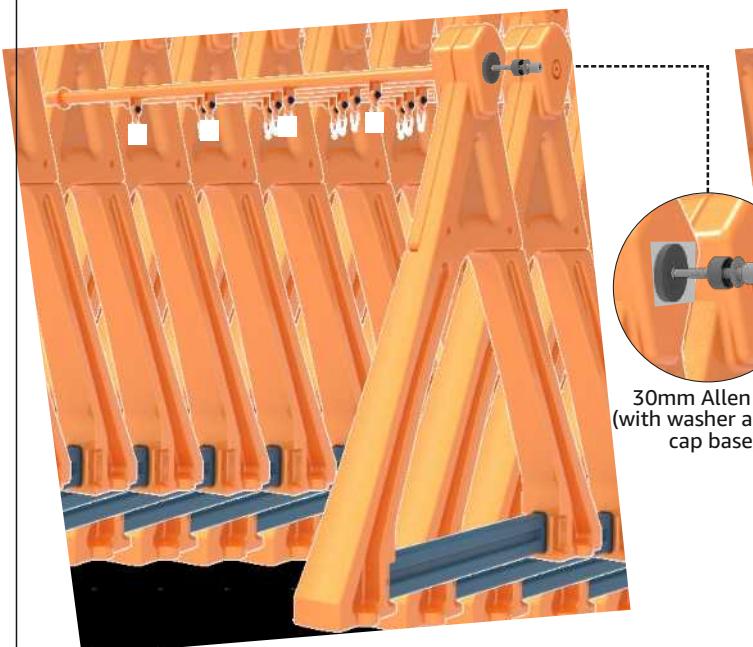


Take one 30mm allen bolt, put a washer and then a nut cap base onto it, and insert the bolt (with washer and nut cap base in place) into the aligned holes of the swing bar and the big end plate. Tighten the bolt with the allen key, securing one end of the swing bar to the swing legs.

Take one nut cap and press it firmly onto the bolt head until it is in place.


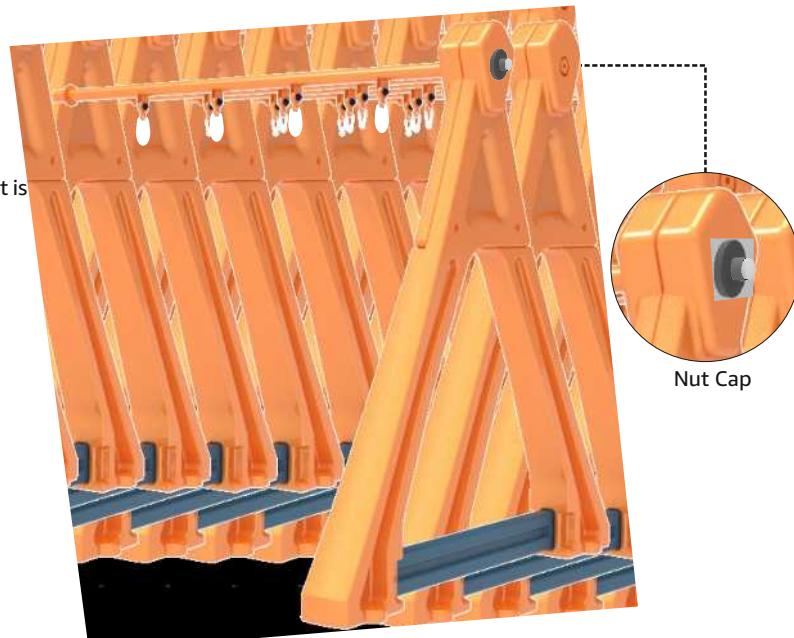


Nut Cap


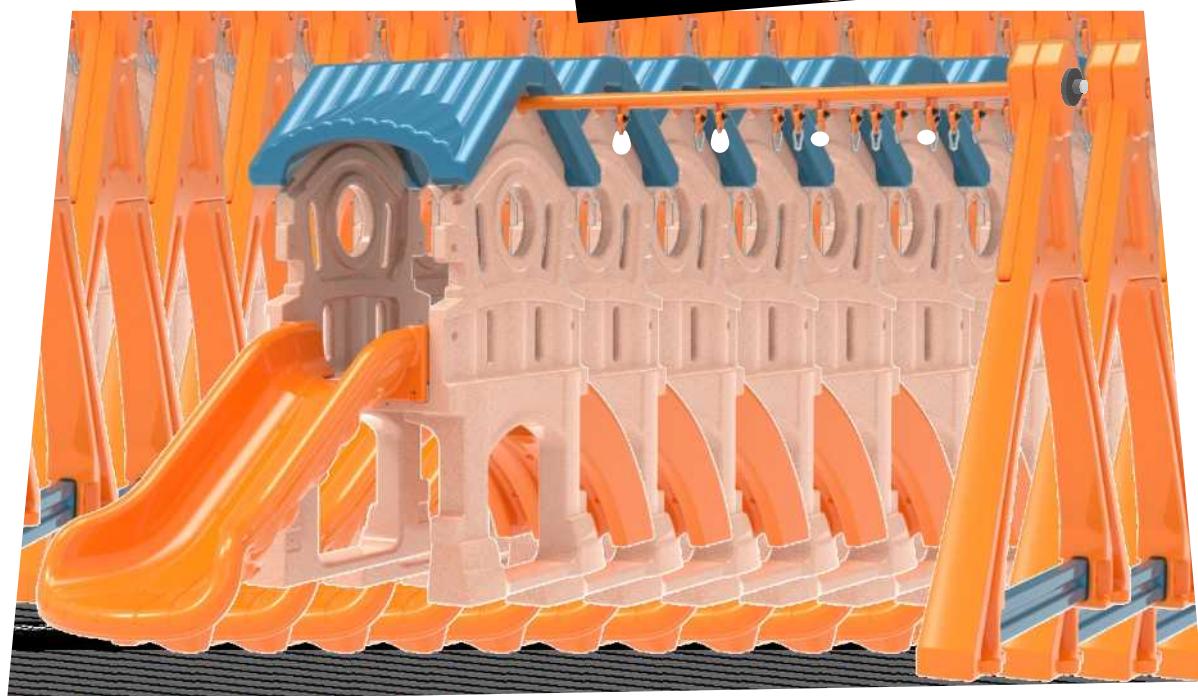


Slide the open end of the swing bar into the top hole (below roof) of the subassembly (step 3). The bar end will fit inside the hole and will be visible from inside the small castle subassembly.


Swing Bar End

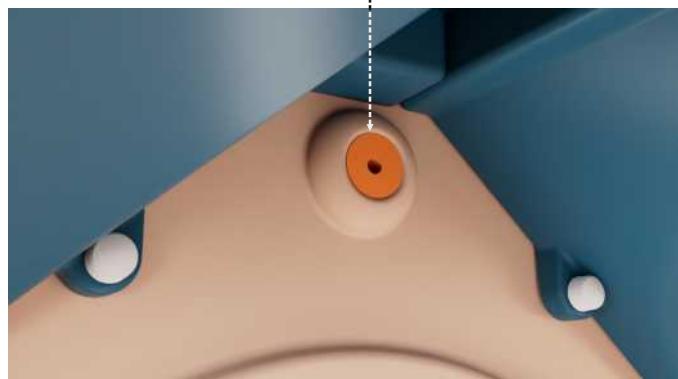


Small End Plate

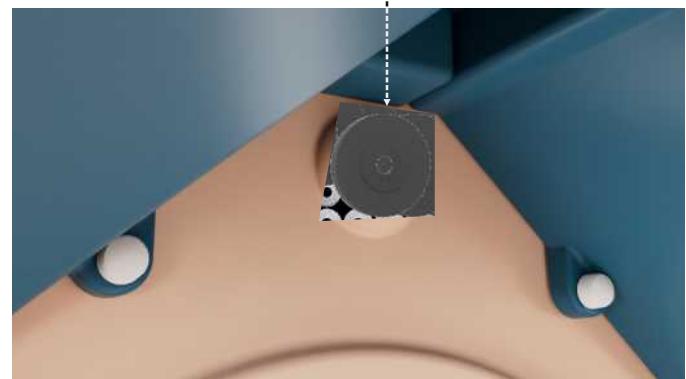


Take one end plate, align the hole at its centre with the hole at the end of the swing bar.




30mm Allen bolt
with washer and
nut cap base

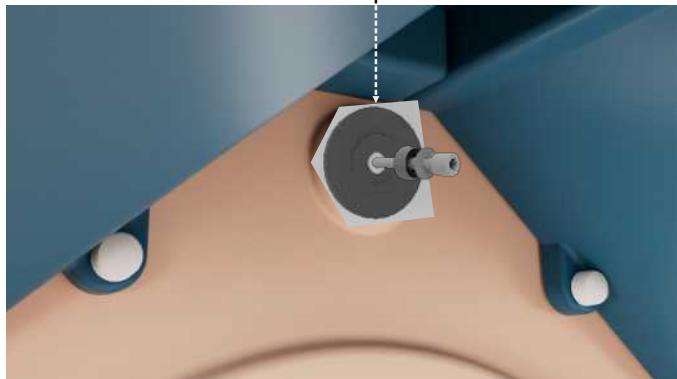

Take one 30mm allen bolt, put a washer and a nut cap base onto it. Insert the allen bolt into the aligned holes of the end plate and the swing bar.




Tighten the bolt
with allen key

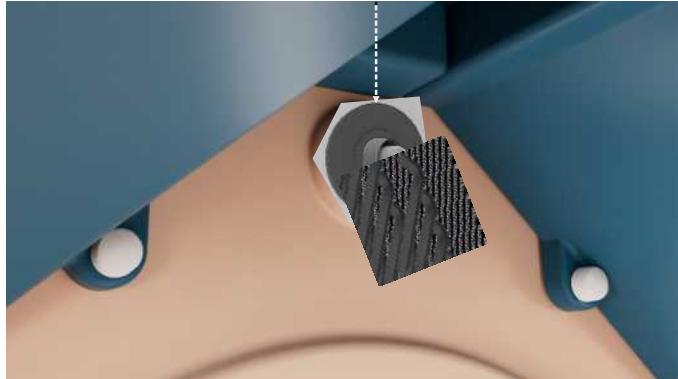


Tighten the bolt with the allen key.

Fix a nut cap onto the bolt head.

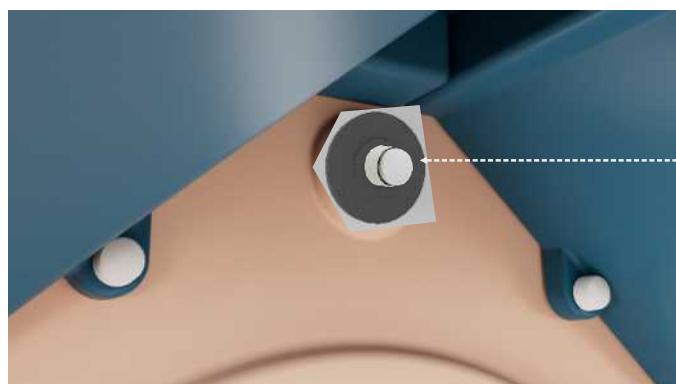


Required Assembly Parts

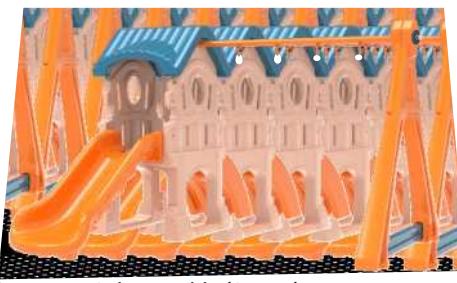

Subassembly (Step 5) x 1



Bucket Swing x 1




Flap Swing x 1

6 STEP

The swing bar features two pairs of rings - one pair for securing the bucket swing and the other pair for the flap swing.

Take the flap swing and attach the snap hooks at the top of its two chains to one pair of rings on the swing rod, ensuring each snap hook is securely fastened to its corresponding ring. Next, secure the bucket swing chains to the other pair of rings.

Note: Inspect thoroughly to ensure all snap hooks are fully closed and both swings are securely fastened before use.

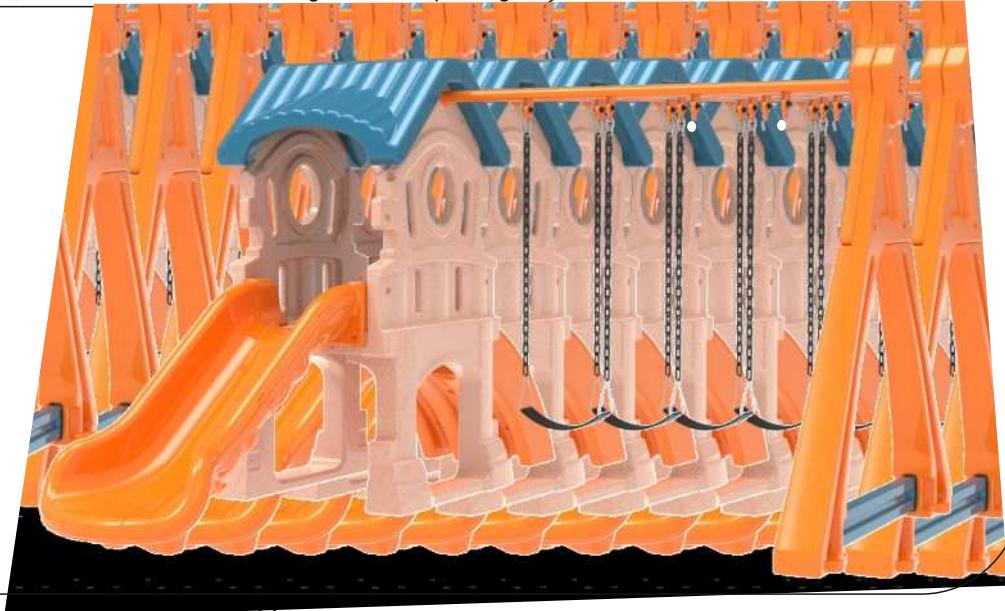



7

STEP

Required Assembly Parts



Vertical Support Bar x 1



Washer x 4



Nut Cap x 4



Nut x 2



Nut Cap Base x 4





Balancing Stone Bar x 1




Allen Bolt (80mm) x 2




Allen Key x 1

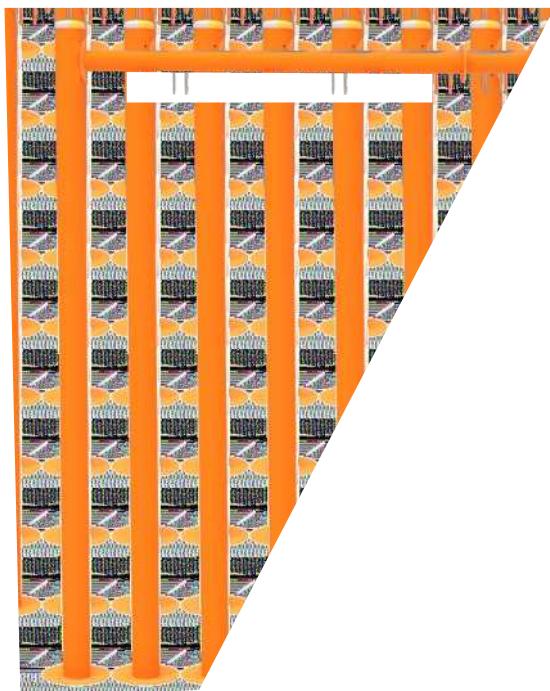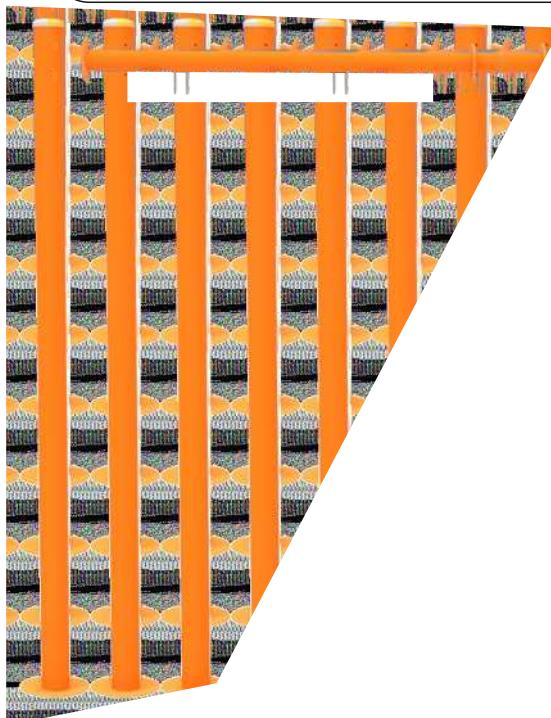

Take the balancing stone bar and align the two holes at its end with the holes near the top of the vertical support bar.

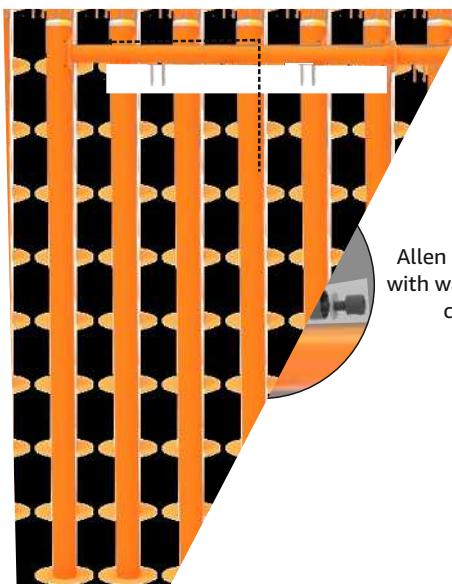


Allen Bolt (80mm)
with washer and nut
cap base

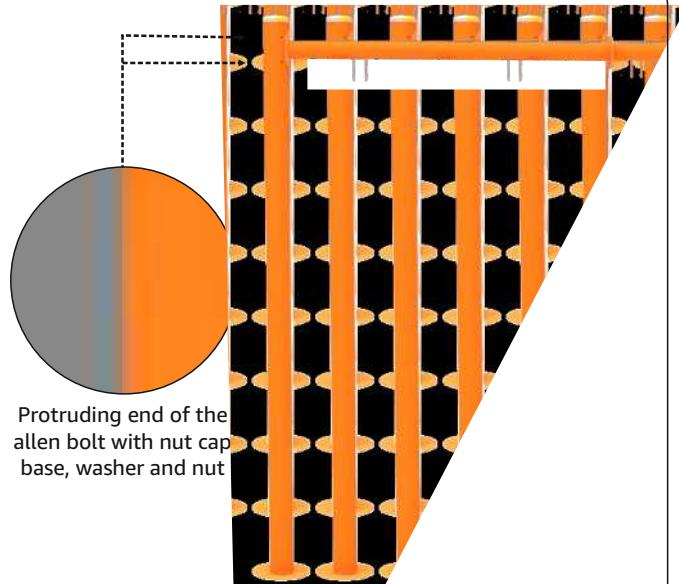


Protruding end of the
allen bolt with nut cap
base, washer and nut

Take two 80mm allen bolts and put a washer and a nut cap base onto both the bolts.

Insert the bolts through the aligned holes of the balancing stone bar and the vertical support bar. The threaded ends of the bolts protrude from the other side of the vertical support bar.

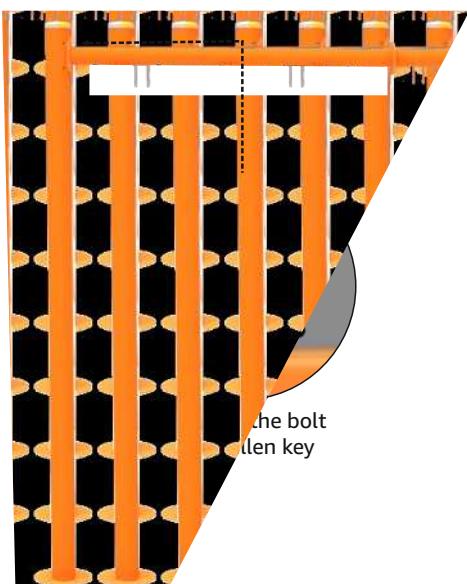


Tighten the bolts with the allen key. **Use the T handle to keep the nut stationary while you tighten the bolt.**

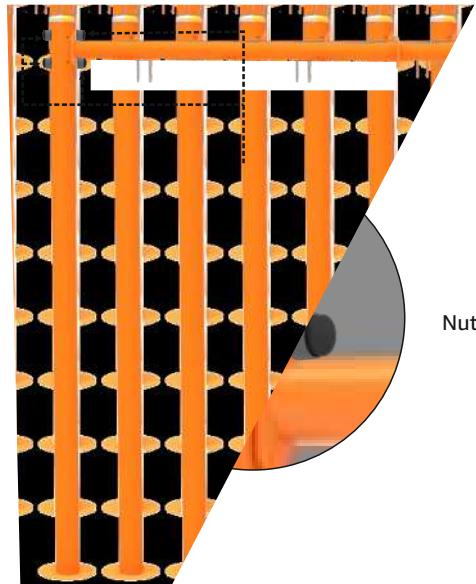

Put a nut cap each on the head and the threaded end of each bolt.


8

STEP

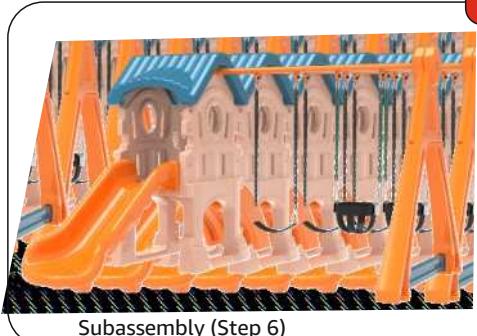

Subassembly (Step 6)

Required Assembly Parts



Subassembly (Step 7) x 1



Allen Key x 1



Nut Cap x 1



Small End Plate x 1



Nut Cap Base x 1




Allen Bolt (30mm) x 1



Washer x 1





Balancing Stone Bar End

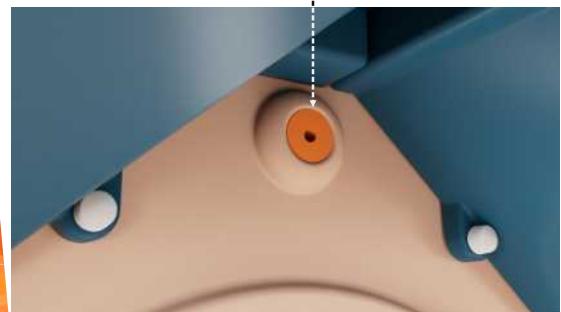


The open end of the balancing stone bar (subassembly - step 7) goes into the top hole (below 100) of the small castle (subassembly - step 6). The bar end will fit inside the hole and will be visible from inside the small castle.

Small End Plate

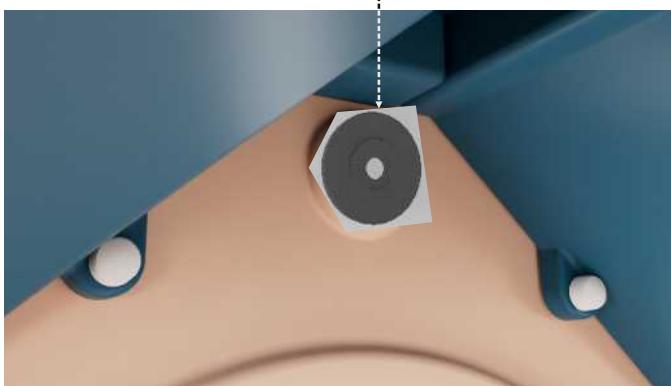



From inside the subassembly, align the hole at its centre of the end plate with the hole at the end of the balancing stone bar.

30mm Allen bolt with washer and nut cap base

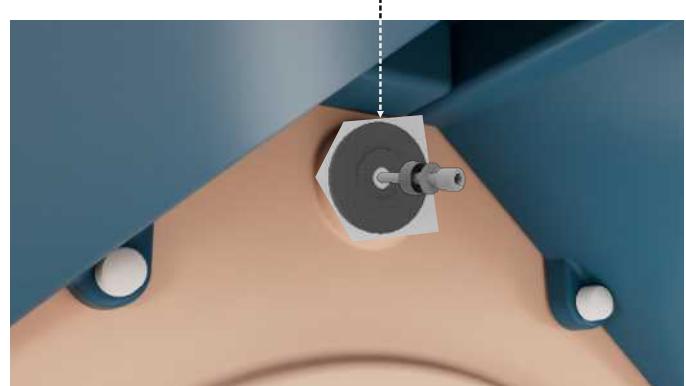



Take one 30mm allen bolt, put a washer and a nut cap base onto it. Insert the allen bolt into the aligned holes of the end plate and the stone bar.

Tighten the bolt with allen key

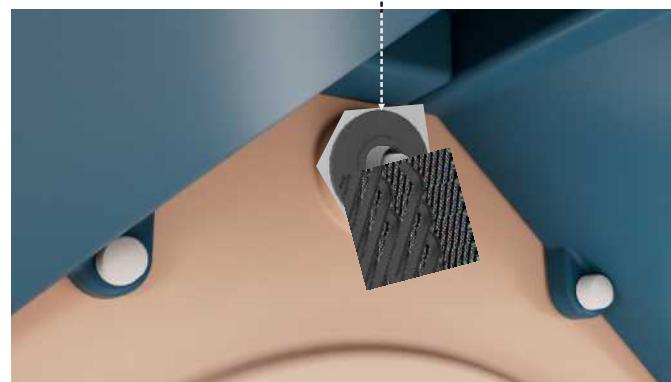

Tighten the allen bolt with the allen key.


Nut Cap

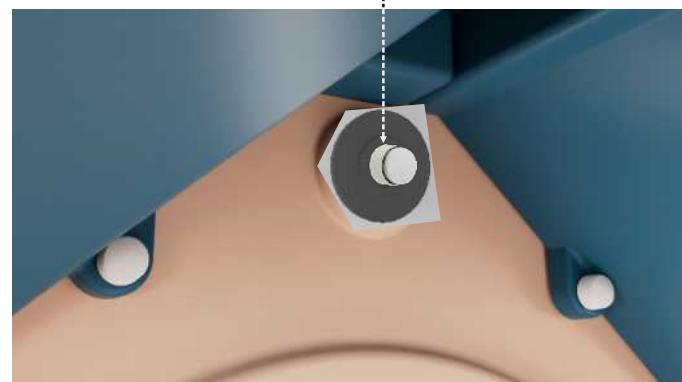



Fix a nut cap onto the bolt head.

9



STEP

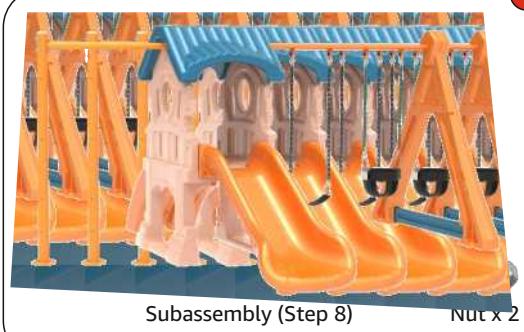

Required Assembly Parts

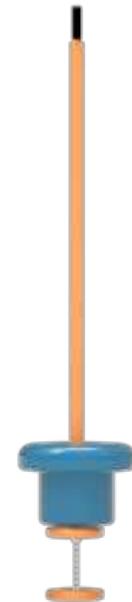


Allen Bolt (20mm)
with a washer




Align the center hole on the underside of the pile cluster with the top of the balancing rod, and gently push the pile cluster downward. As you lower it, ensure that the rod passes through the center and emerges from the upper hole of the pile cluster. Continue pressing until the pile cluster is fully seated against the upper plate of the balancing stone rod. Additionally, make sure the three remaining holes on the pile cluster underside are aligned with the three holes on the upper plate of the balancing stone rod.

Take three 20mm allen bolts and put a washer onto each. Insert one 20mm allen bolt (with washer) into each of the three aligned hole pairs of pile cluster and upper plate.

Tighten the allen bolts one by one with the allen key, fastening the pile cluster to the upper plate.

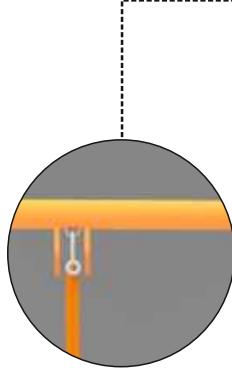


Allen Bolt (50mm)
with a washer and
a nut cap base

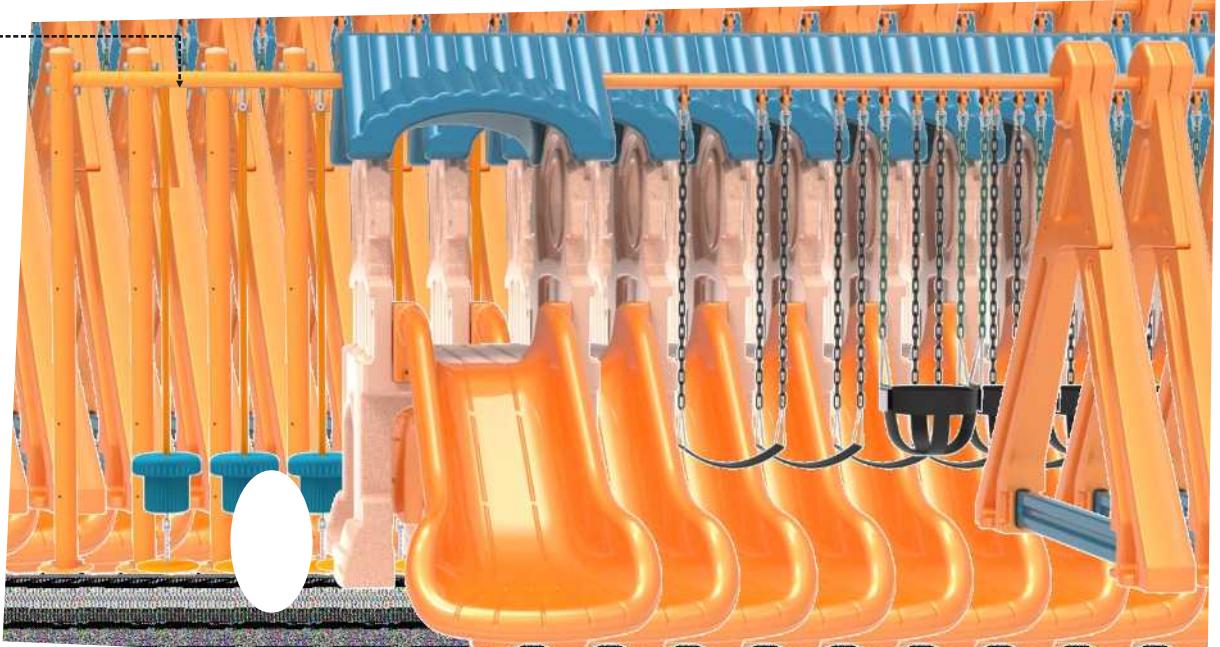

Balancing stone bar features two pairs of clamps, each pair designed for securing one balancing stone set to the balancing stone bar. Take one 50mm allen bolt and put a washer followed by a nut cap base onto it, making sure the open end of the nut cap base is oriented towards the bolt head.


Insert the allen bolt (with washer and nut cap base) through the aligned holes of the clamps and the balancing stone set.




Put a nut cap base first and then a washer and a nut onto the protruding end of the bolt




Put a nut cap base, followed by a washer and a nut onto the protruding end of the allen bolt. Make sure the open end of the nut cap base is facing the bolt end.

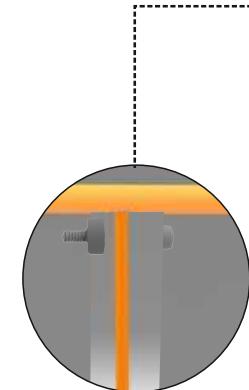


Tighten the bolt with allen key

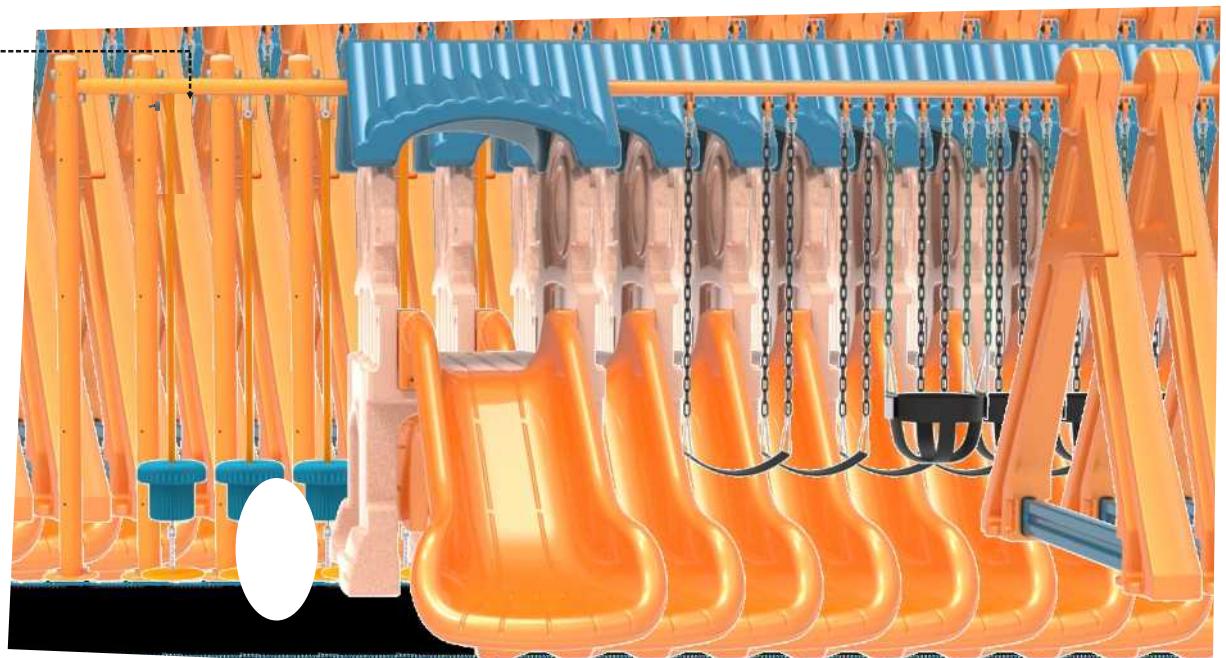


Tighten the allen bolt with the allen key. Use the T handle to keep the nut stationary while tightening the bolt.



Nut Cap

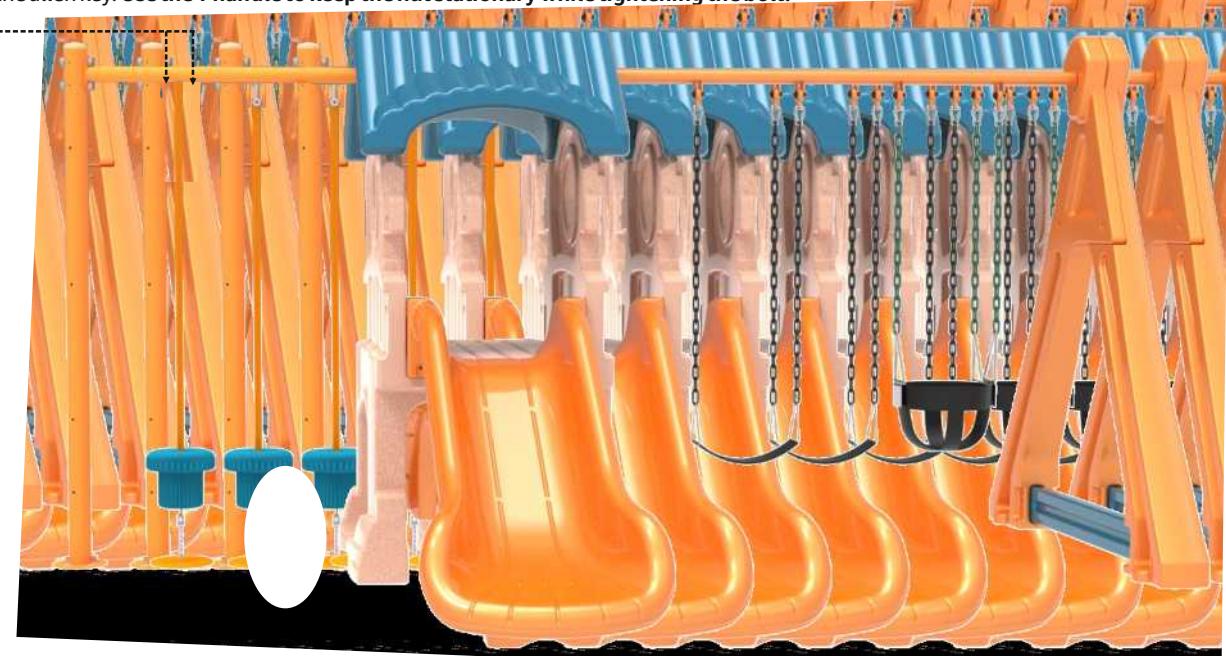

Put a nut cap onto the head and the protruding end of the allen bolt.

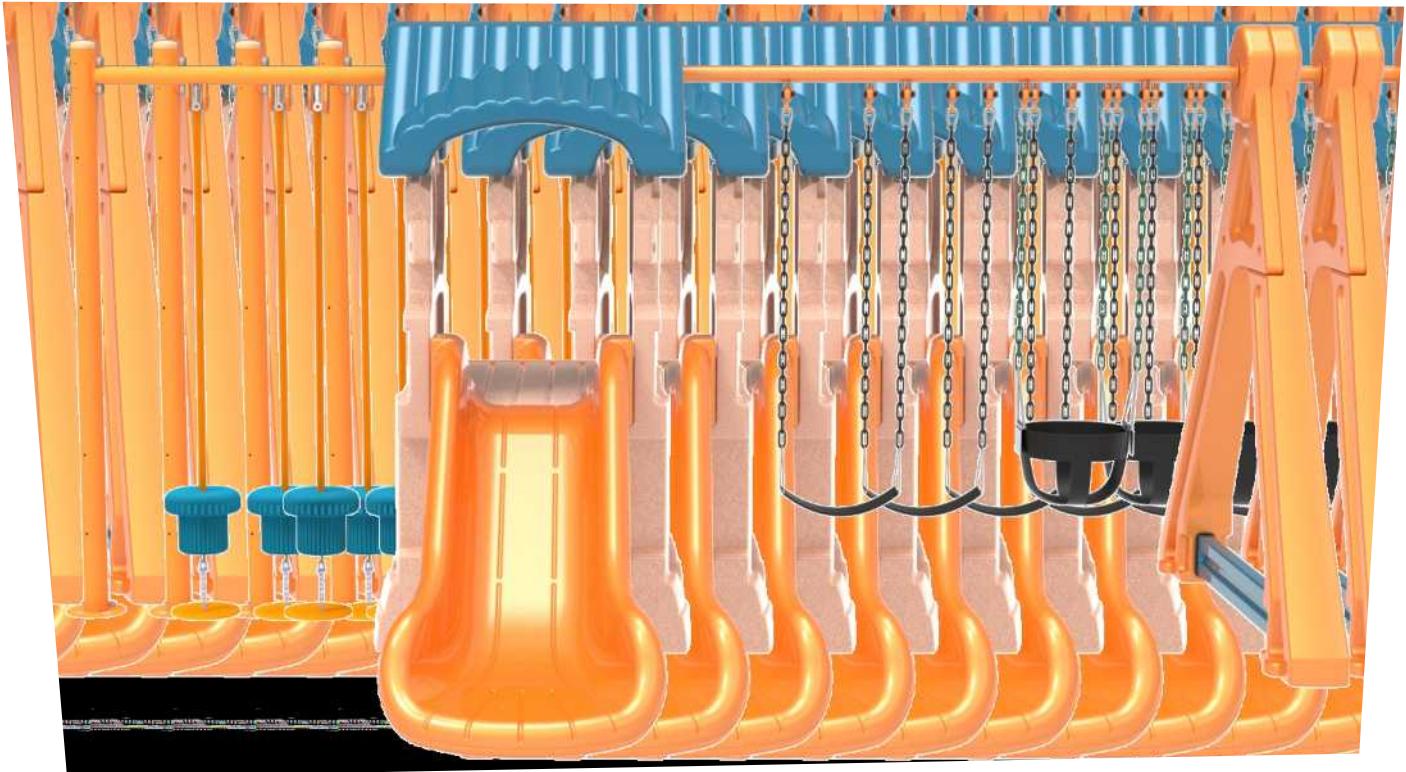

Follow the sequence of actions mentioned in this step to fix the other balancing stone set into place.

Your Crown PlayCASTLE is now ready for use.

