



COMMERCIAL
Smart Solutions for Play and Beyond

FANTASY PlayCASTLE

Tips for Safe & Joyful Play

Welcome to a world of adventures. Your child's safety always comes first and by following these simple guidelines, you can create a joyful, safe play space.

- Before starting, refer to the "Location Selection Guide" to choose the perfect spot to install your Fantasy PlayCASTLE. Make sure product is placed on a level surface to guarantee safety, proper function and durability.
- Fantasy PlayCASTLE is designed for an adult-only assembly to ensure every piece is fitted with precision. Keep all the parts out of the reach of children until the product is fully assembled.
- To protect the parts from scratches, assemble the product on a non-abrasive surface.
- Packaging materials are not safe to play with and should be kept away from children.
- Do not discard the spare fasteners provided with the product. They may be useful in the future.
- Before each play session, take a few minutes to confirm that all the fasteners are firmly tightened and all the parts are securely fastened. Make sure the play area is free of sharp objects, debris or other potential hazards that may cause injuries.
- Teach your child to sit upright and go down feet-first on the slide. Climbing up the side, sliding down headfirst or in the standing position can be fatal and should be avoided at all costs. Additionally, parents should discourage their children from jumping off the slide seat.
- Do not attach any external ropes, chains, or accessories not supplied with the Fantasy PlayCASTLE, as these may interfere with the normal functioning of the product.
- Only one child on the slide is recommended at a time. Children should wait until the landing area is completely clear before going down the slide.
- The product is intended for use by kids over 2 years of age and has a play capacity of up to 8 children at a time. Never exceed the user limit.
- While assembling the Fantasy PlayCASTLE, do not overtighten the bolts as this may cause damage to the parts.
- Adult supervision is recommended at all times to promote safe play and provide immediate assistance (when required).
- Regularly wipe the product with a clean, dry cloth regularly and avoid using harsh chemicals. For detailed care instructions, refer to the "Operation and Maintenance Guide" provided with the product.



Part Details



Small Castle Side Panel x 2



Small Platform x 1



Small Castle Stair x 1



T-Handle x 1



Small Castle Roof x 2



Slide x 1

List of Parts	No.
Small Castle Side Panel	2
Small Castle Stair	1
Small Platform	1
Slide	1
Small Castle Roof	2
Allen Key	1
T Handle	1
Swing Leg	2
Swing Leg Support	1
Big End Plate	1
Small End Plate	2
Swing Bar	1
Bucket Swing	1
Flap Swing	1
Spider Net Bar	2
Spider Net Vertical Support Bar	2
Spider Net	1
Ladder Bar	1
Rope Ladder	1
Rope Climber	1
Washer	51
Nut Cap Base	56 (9 Spare)
Nut Cap	56 (9 Spare)
Nut	31
Allen Bolt (30mm)	15
Allen Bolt (40mm)	4
Allen Bolt (50mm)	5
Allen Bolt (60mm)	4
Allen Bolt (70mm)	4
Allen Bolt (80mm)	8
Allen Bolt (110mm)	2
Allen Bolt (150mm)	2
Instruction Manual	1
Anchor Fastener	15

**Assembly requires a minimum of 2 people.
Have a third person assist when necessary.**

Model No: FAPC

2+
YEARS



Customer Support



Assembly Video

Before starting the assembly, please ensure that the part quantity matches the numbers listed in the manual. If you find any discrepancies in the part count or encounter any product-related issues, feel free to reach out to us at +918221001033 or connect with us via WhatsApp in between 9:30-6PM, Monday to Saturday. We're here to assist you!

DISCLAIMER: Actual product color may vary slightly from what is shown in the image.



Nut Base x 56
(9 Spare)



Nut Cap x 56
(9 Spare)



Nut x 31



Allen Bolt (40mm)
x 4



Allen Bolt (50mm)
x 5



Washer x 51



Allen Bolt (30mm)
x 15



Allen Bolt (60mm)
x 4



Allen Bolt (70mm)
x 4



Swing leg x 2



Swing Leg Support
x 1



Swing Bar x 1



Instruction Manual
x 1




Bucket Swing x 1



Flap Swing x 1



Rope Climber x 1

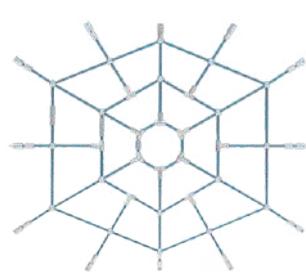

Spider Net x 1



Rope Ladder x 1



Ladder Bar x 1



Spider Net Vertical
Support Bar x 2



Allen Key x 1



Big End Plate x 1



Spider net Bar x 1



Small End Plate x 2



Anchor Fastener
x 15

⚠️ WARNING ⚠️

Anchoring the PlayCASTLE (Mandatory)

For enhanced stability and safety, OK Play recommends anchoring the Play Castle to the floor. PlayCASTLE may also be used without anchoring but securing it to the floor will minimize movement during play.

To secure the PlayCASTLE to the floor:


1. Drill holes in the floor at the positions where the play castle is to be anchored.
2. Position the play set at the desired location, aligning pre-drilled holes on the base of both side panels with the drilled holes.
3. Insert an anchor fastener (provided in the packaging) through each of the two holes on both small castle side panels, making sure each anchor fastener passes directly into the corresponding drilled hole on the floor.
4. Tighten the anchor fasteners firmly to secure the side panels to the floor.

Repeat the above mentioned steps to anchor the swing legs (one anchor fastener for each swing leg), rope ladder base plate (three anchor fasteners) and spider net vertical support bars (three anchor fastener for each bar) to the floor.

Once completed, the play set will be anchored securely, minimizing movement during use.

Bolt Size Identification

To identify the bolt size, place it on the printed image and match the length of the bolt threaded shaft with the illustration.

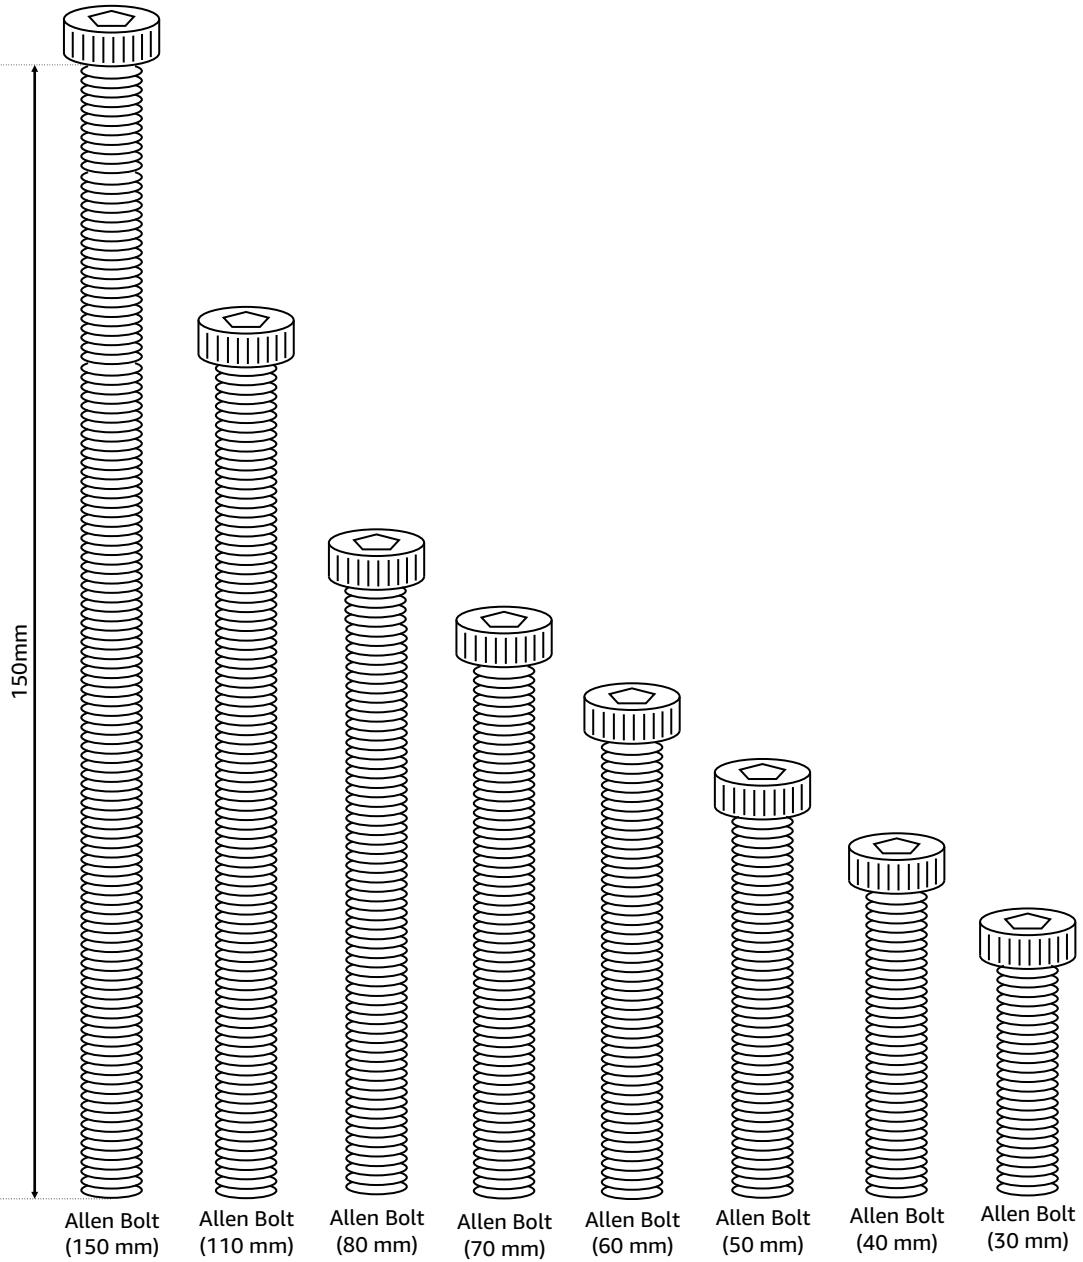

1

Assembly Instructions

STEP

Required Assembly Parts



Nut Cap Base x 8



Small Castle Side Panel x 2




Nut Cap x 8



Nut x 4



Allen Key x 1



Small Platform x 1



T-Handle x 1



Washer x 12



Small Castle Roof x 2



Allen Bolt (60mm) x 4



Allen Bolt (70mm) x 4

Assemble the PlayCASTLE on a soft, non-abrasive surface to protect it from scratches.



Place the two small castle side panels upright on a flat, stable surface, making sure they are parallel to each other and at an appropriate distance apart.



Position the small platform between the side panels making sure the grooves on the underside of the small platform align with the tabs on the inner side of the side panels. Carefully move the platform downward so it fits securely between the small castle side panels.



60mm Allen Bolt (with washer)




A. Take four 60 mm allen bolts and put a washer onto each.

B. From underneath the subassembly, insert one 60mm allen bolt (with washer) into each of the four aligned hole pairs of the small castle side panels and the small platform.

Tighten all the allen bolts one by one with the allen key.

Place one small roof on top of the assembled small panels as shown in the image above.

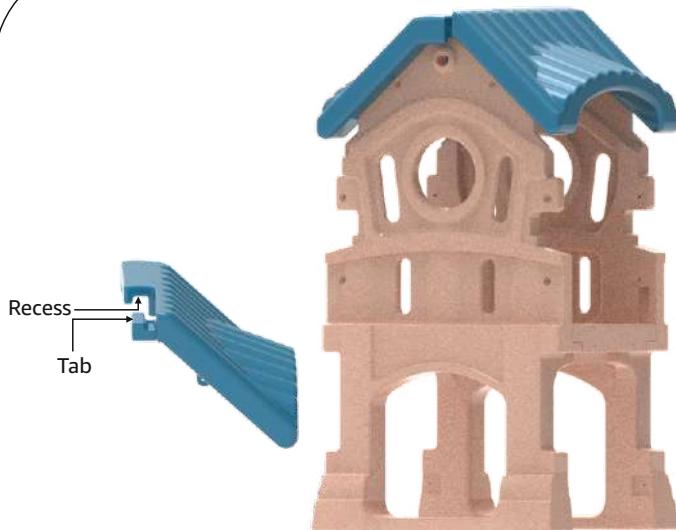

Take the other small roof and place it on top of the side panels, making sure the top edges of both small roofs are aligned.




Interlock the two small roofs together by inserting the tab of one small roof into the corresponding recess of the other. Adjust the roofs, if needed, so they fit properly.

Note: Make sure the top edges of the small castle side panels fit into the grooves on the underside of the assembled roof panel.




Put a washer first and then a nut cap base onto a 70mm allen bolt and insert the bolt (with the washer and the nut cap base in place) through the aligned holes of the roof panel and the side panel. The threaded end of the allen bolt protrudes from the other side

Allen bolt (70mm) with a washer and a nut cap

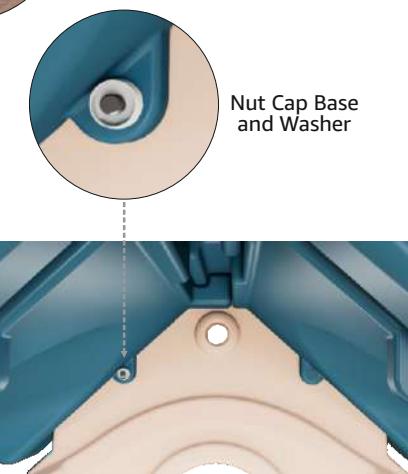


Nut Cap Base and Washer

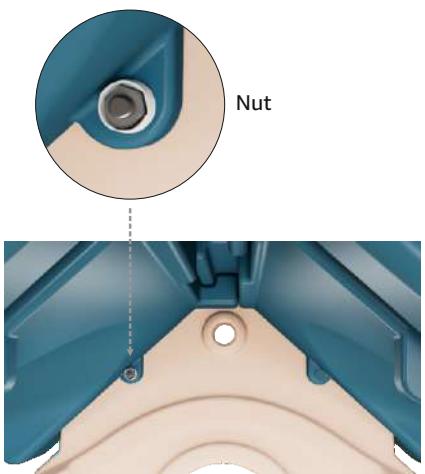

Nut


From inside the subassembly, place a nut cap base and a washer onto the allen bolt (inserted in the previous step) from the bolt end.

Take a nut and put it onto the allen bolt from the bolt end.

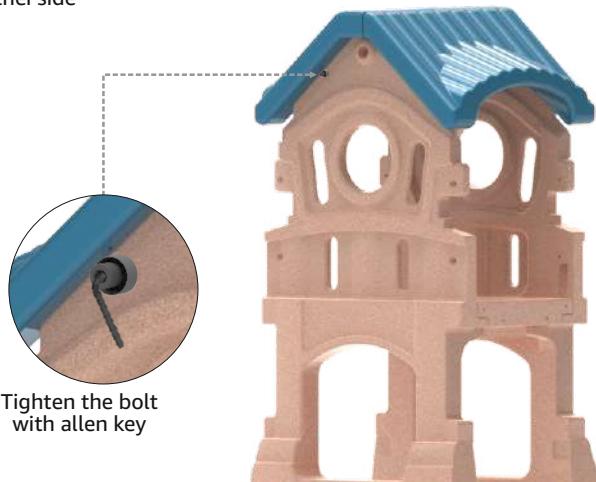


Tighten the bolt with allen key

From outside the subassembly, tighten the allen bolt with the allen key provided in the packaging. Use the T-handle to hold the nut stationary while tightening the allen bolt.

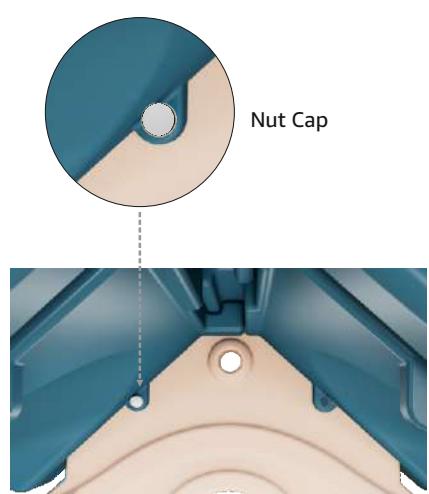

Place the nut cap onto the bolt end and press it firmly until it fits securely in place.


From outside the subassembly, fit a nut cap onto the bolt head.



Nut Cap



Repeat the above steps to insert one 70 mm allen bolts, fitted with a washer, through each of the remaining three aligned hole pairs of the small castle side panel and the roof. For each allen bolt, use two nut cap bases, two washers, a nut and then tighten the bolt with the allen key as mentioned in the sequence of actions in this step. **Once tightened, put a nut cap onto the head and the end of each bolt.**

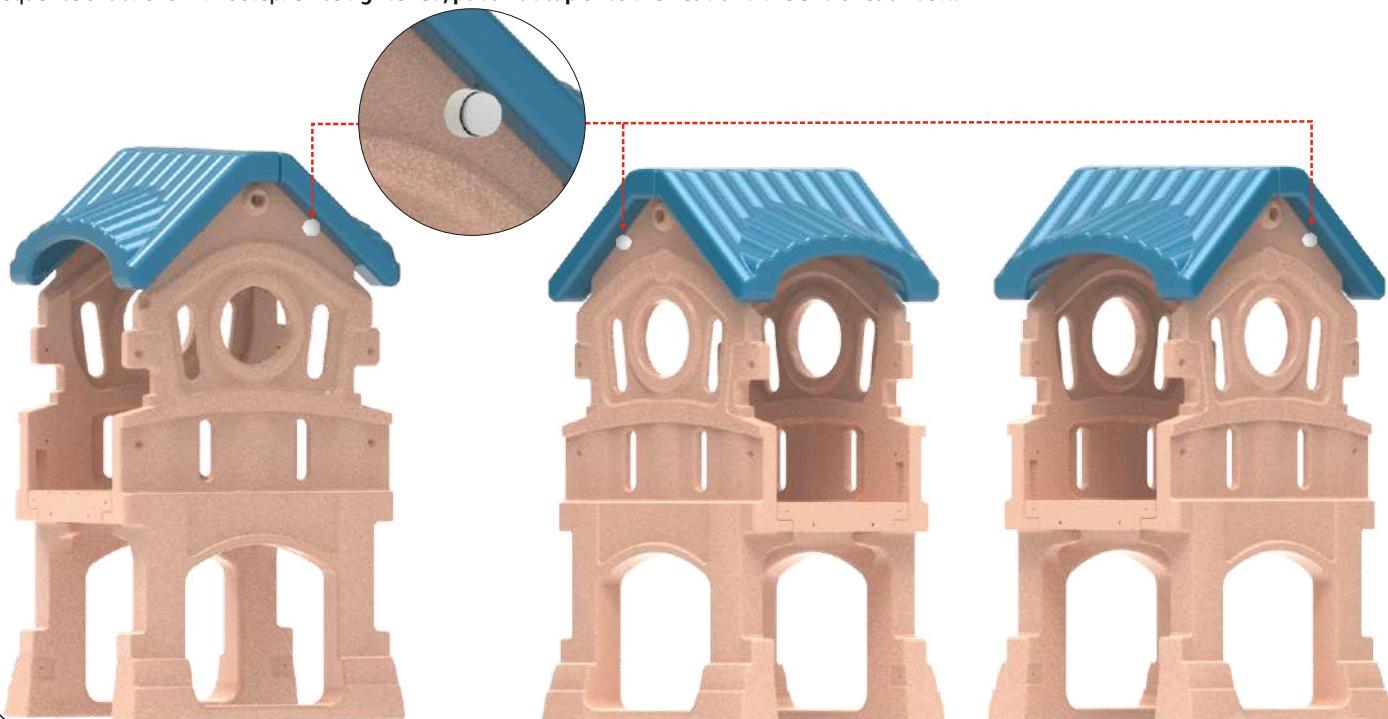

2

STEP

Required Assembly Parts



Subassembly (Step 7)



Slide x 1



Washer x 4



Allen Bolt (40mm) x 4




Nut Cap Base x 4





Allen Key x 1






Nut Cap x 4

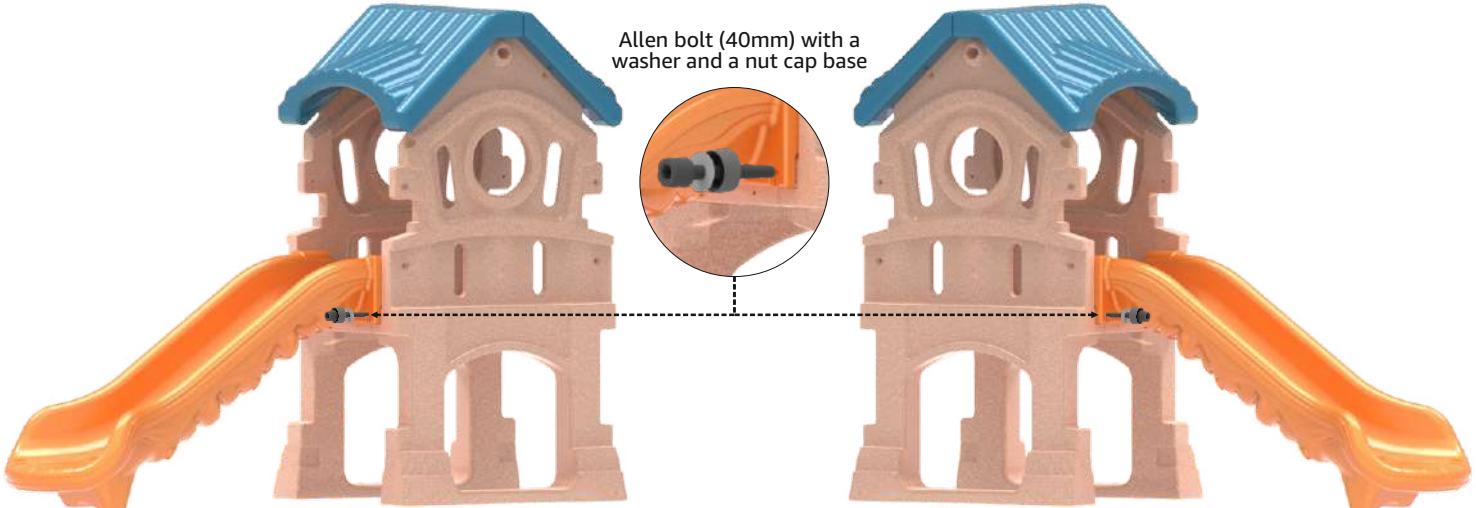

Take the slide and fasten it to the subassembly (step 7) by tightening the four allen bolts (40mm), each with a washer and a nut cap base, with the allen key. Put a nut cap each onto the head of all the allen bolts.

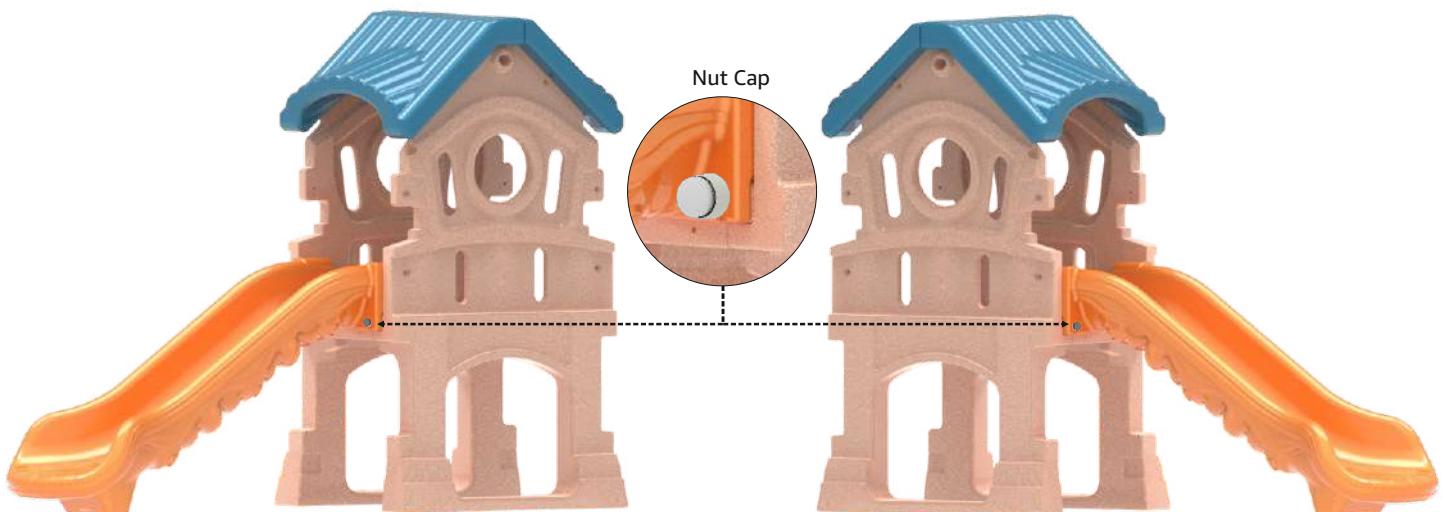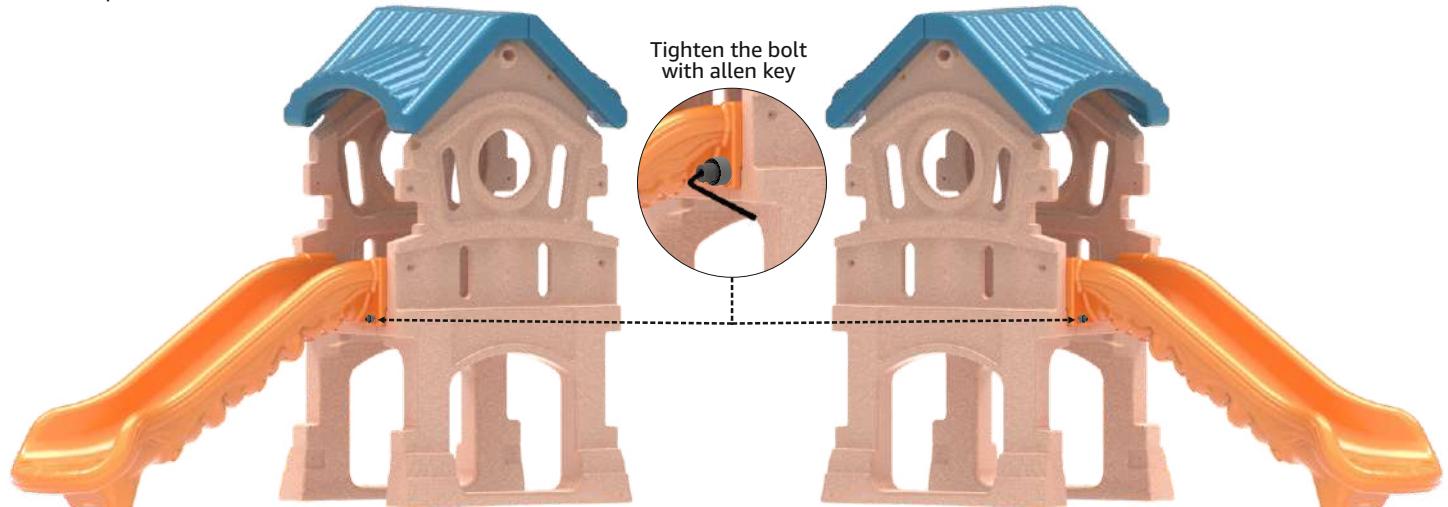

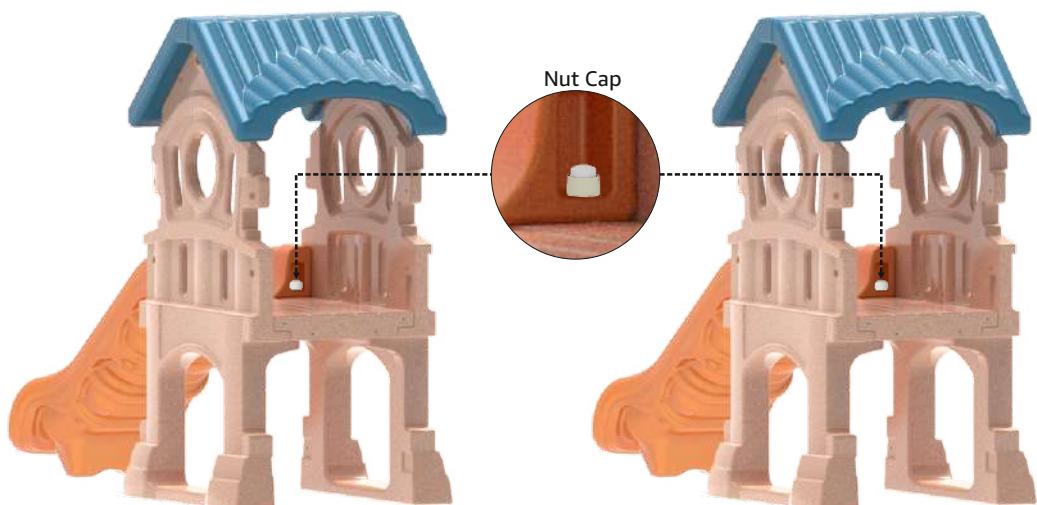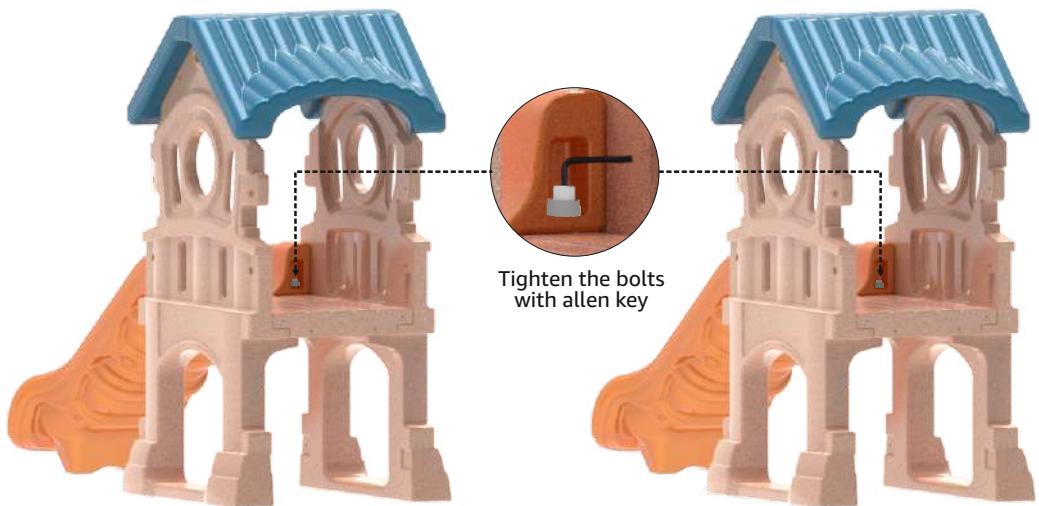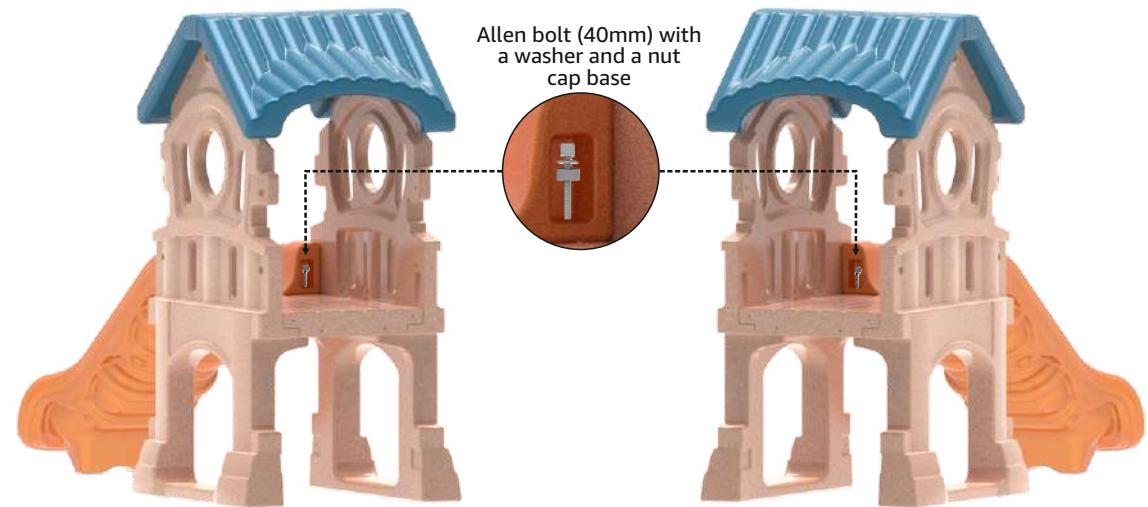



3
STEP

Required Assembly Parts






Allen Bolt (50mm) with
a washer and a nut
cap base

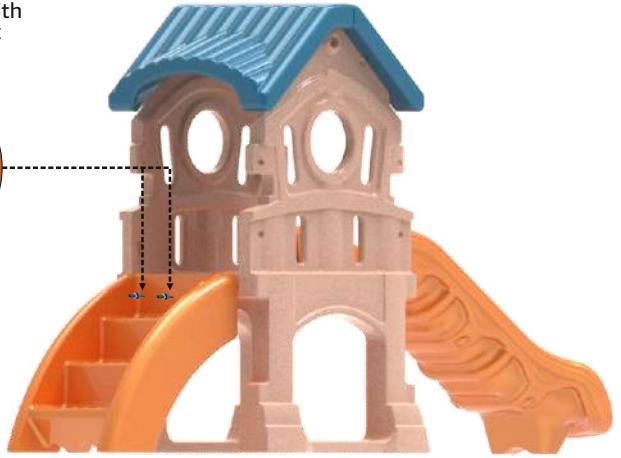


Take the stair panel and place it at the position as shown in the image above. Make sure the holes at the top of the stair are aligned with the corresponding holes on the platform.

Put a washer and a nut cap base each onto the two allen bolts (50mm). Insert one bolt (with a washer and a nut cap base) into each of the two pairs of the aligned holes.

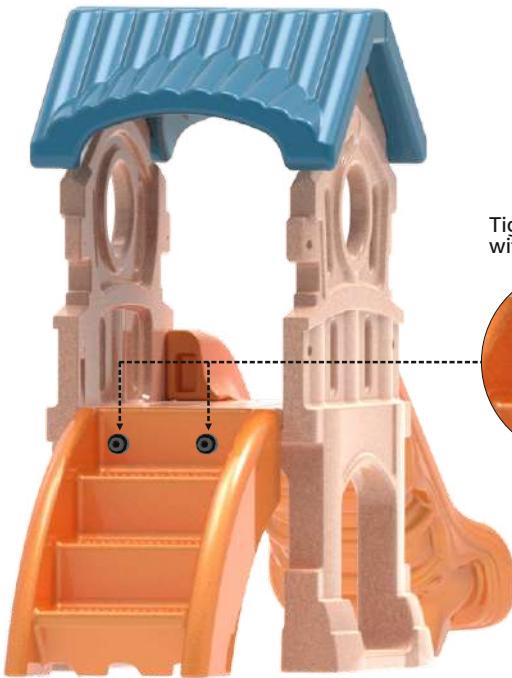

Tighten both the allen bolts one by one with the allen key.

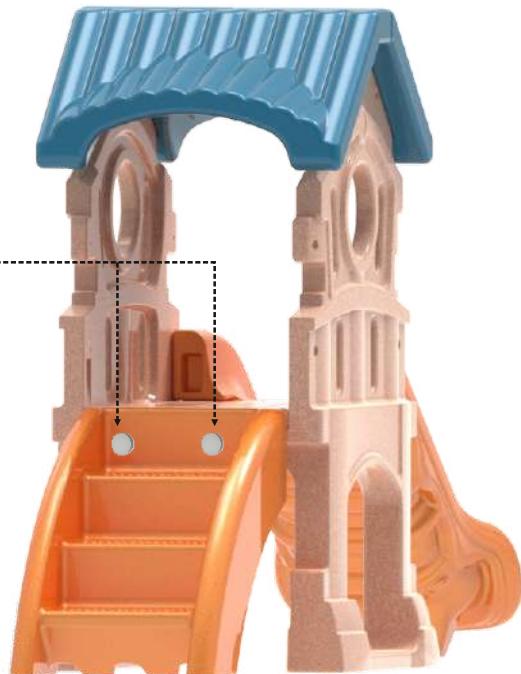

Put a nut cap each onto both the allen bolts.

4

STEP

Required Assembly Parts



Swing Leg x 2



Nut Cap x 8



Allen Bolt (110mm) x 2



Washer x 8



Swing Leg Support x 1



Allen Key x 1






Nut x 4



Allen Bolt (150mm) x 2



Nut Cap Base x 8

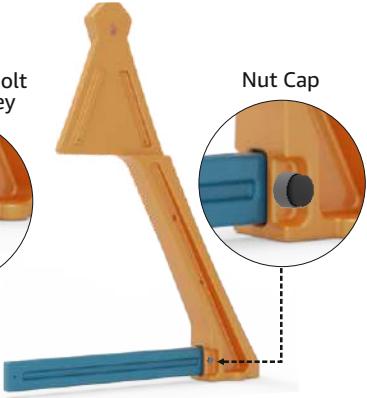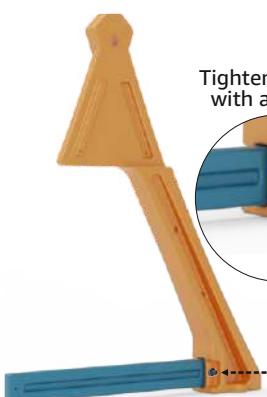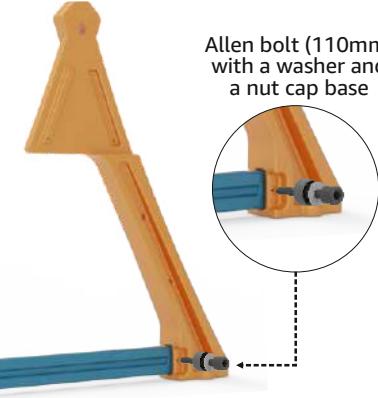

A. Take a swing leg and the swing leg support. Slide one end of the swing leg support into the designated slot at the bottom of the swing leg as shown in the images above.

B. Take one 110mm allen bolt, and put a washer and a nut cap base onto it.

C. Insert the bolt (with washer and nut cap base) through the bottom aligned holes of the swing leg and the swing leg support as shown in the image above. The threaded end of the bolt protrudes from the other side.



D. From the protruding end of the bolt, place a nut cap base first, then a washer followed by a nut.

E. Tighten the allen bolt with the allen key.

Note: Use the T-handle to keep the nut stationary when you tighten the bolt.

Fix a nut cap each onto the head and the threaded end of the bolt.

Use the above mentioned steps to attach the other swing leg to the swing leg support.

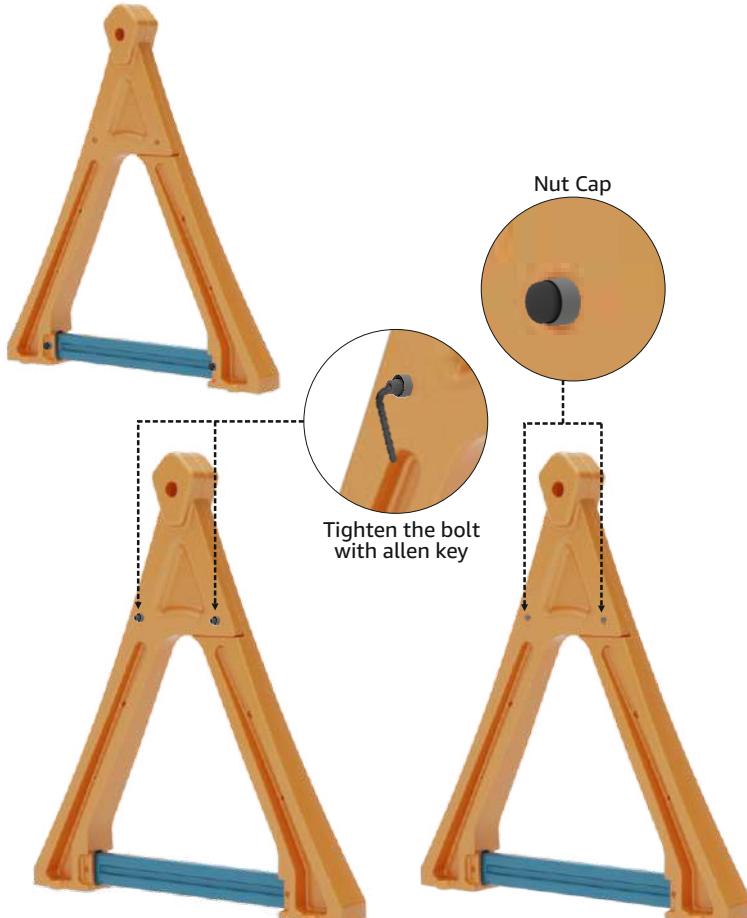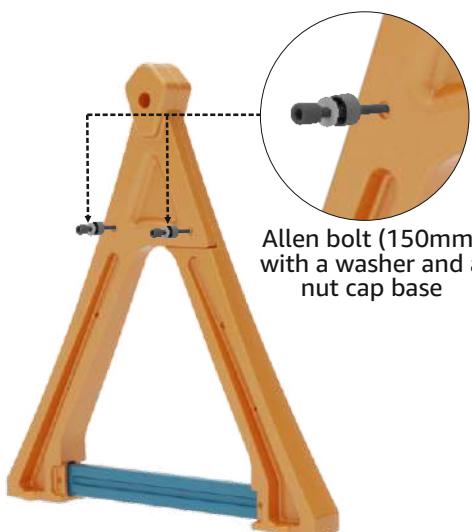

A. Take two 150mm allen bolts, and put a washer first and then a nut cap base onto each bolt.

B. Insert one bolt (with the washer and the nut cap base) each through the aligned holes of the swing legs as shown in the image above. The threaded end of the bolt protrudes from the other side.

C. From the protruding end of each bolt, place a nut cap base first, then a washer followed by a nut.

D. Tighten both the allen bolts one by one with the allen key.

Note: Use the T-handle to keep the nut stationary when you tighten the bolt.

Fix a nut cap each onto the head and the threaded end of both the bolts.

5

STEP



Take the swing bar and insert its one end into the hole at the top of the subassembly (step 4). Slide the bar through until its stop ring comes into contact with the top portion of the swing legs.



Take one big end plate, align the hole at its centre with the hole at the end of the swing bar (on the swing leg side).



Take one 30mm allen bolt, put a washer and then a nut cap base onto it, and insert the bolt (with washer and nut cap base in place) into the aligned holes of the swing bar and the big end plate. Tighten the bolt with the allen key, securing one end of the swing bar to the swing legs.




Take one nut cap and press it firmly onto the bolt head until it is securely in place.




Slide the open end of the swing rod into the top hole (below roof) of the subassembly (step 3). The bar end will fit inside the hole and will be visible from inside the small castle subassembly.


Swing Bar End
(Inside the small castle)

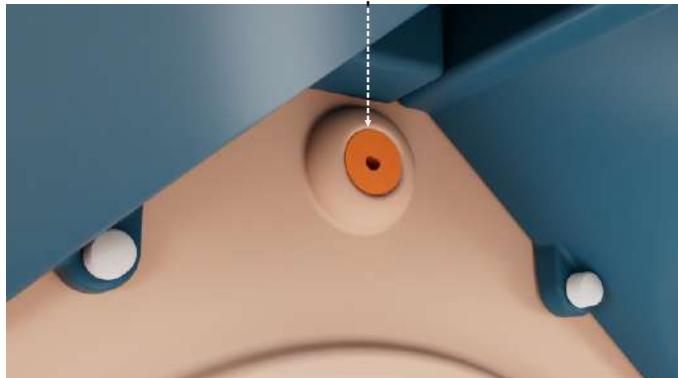


Small End Plate

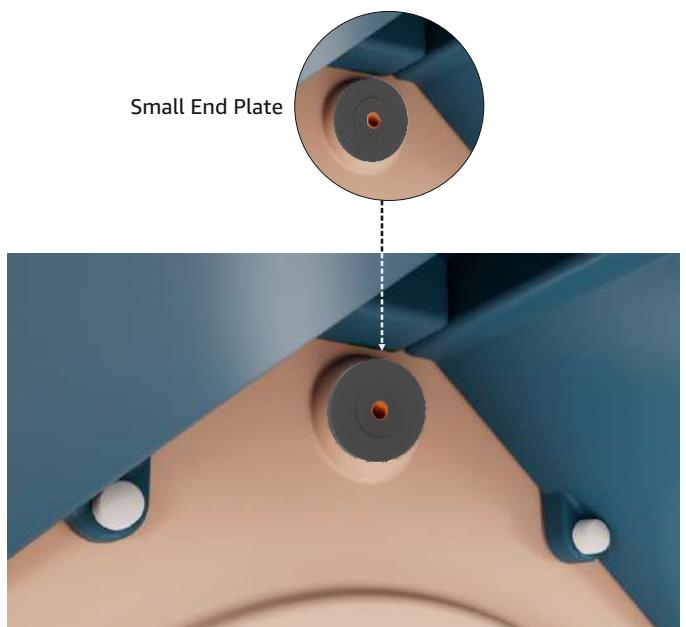


Take one end plate, align the hole at its centre with the hole at the end of the swing bar (inside the small castle).




30mm Allen bolt with washer and nut cap base

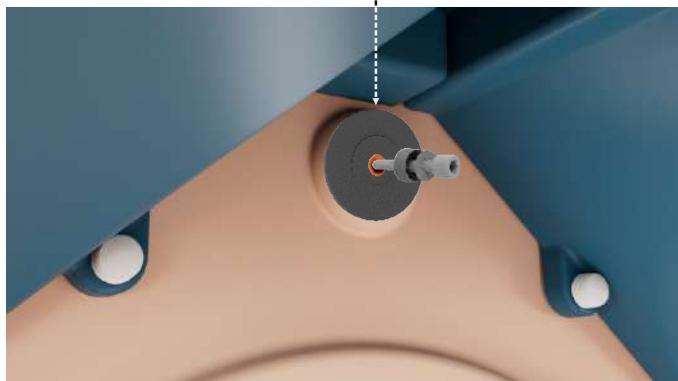

Take one 30mm allen bolt, put a washer and a nut cap base onto it. Insert the allen bolt into the aligned holes of the end plate and the stone bar.




Tighten the bolt with allen key

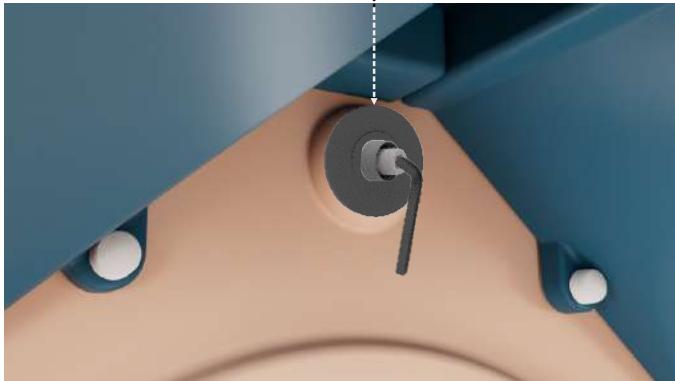

Tighten the bolt with the allen key.

Fix a nut cap onto the bolt head.

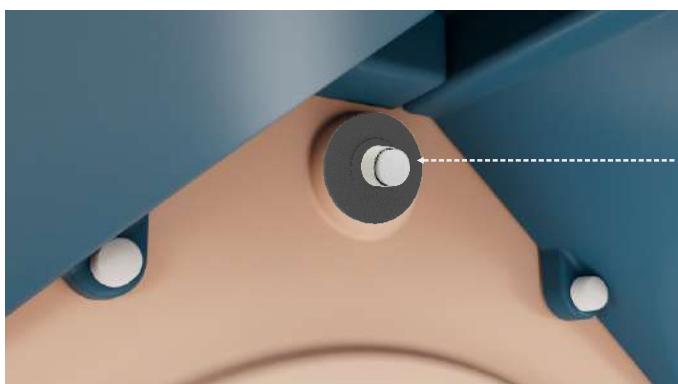


Required Assembly Parts



Subassembly (Step 5) x 1



Bucket Swing x 1



Flap Swing x 1

6 STEP

The swing bar features two pairs of rings - one pair for securing the bucket swing and the other pair for the flap swing.

Take the flap swing and attach the snap hooks at the top of its two chains to one pair of rings on the swing rod, ensuring each snap hook is securely fastened to its corresponding ring. Next, secure the bucket swing chains to the other pair of rings.

Note: Inspect thoroughly to ensure all snap hooks are fully closed and both swings are securely fastened before use.






7

STEP




Required Assembly Parts




Take the ladder bar and align the two holes at its end with the holes near the top of the spider net vertical support bar.

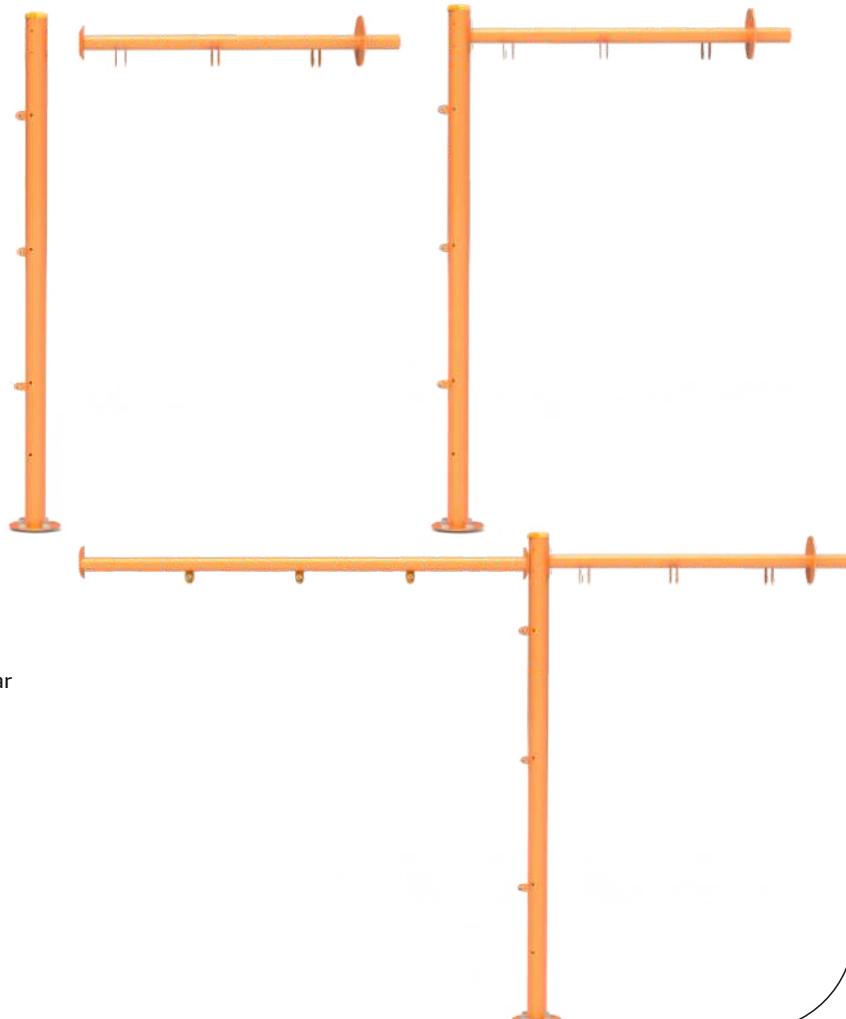


Take the spider net bar and align the holes at its end with the holes near the top of the spider net vertical bar as shown in the image.

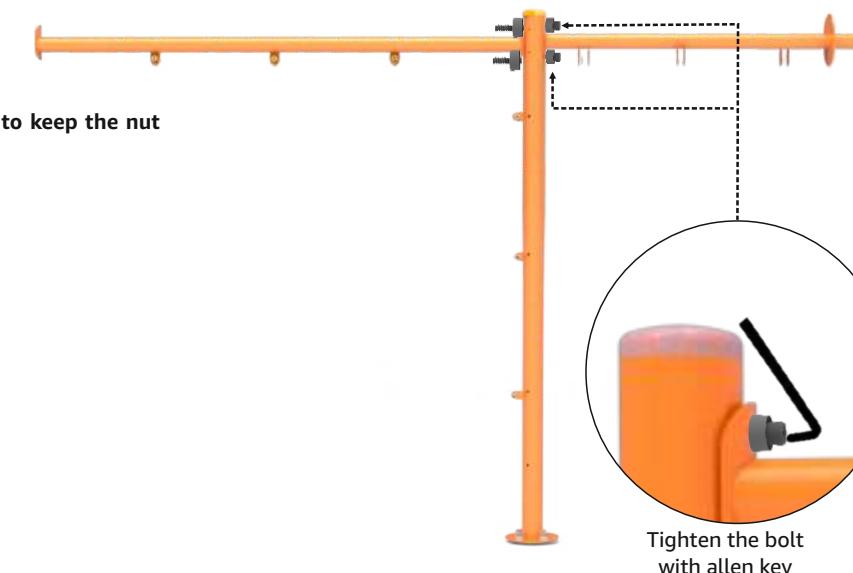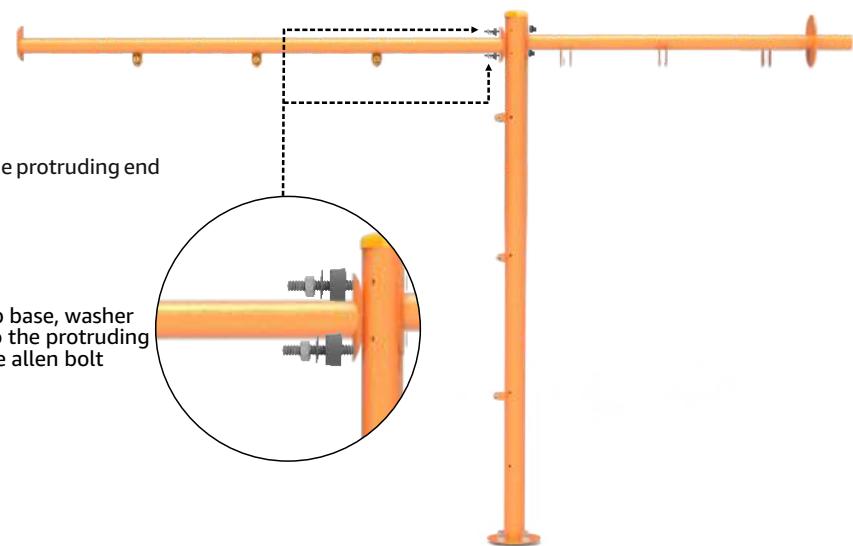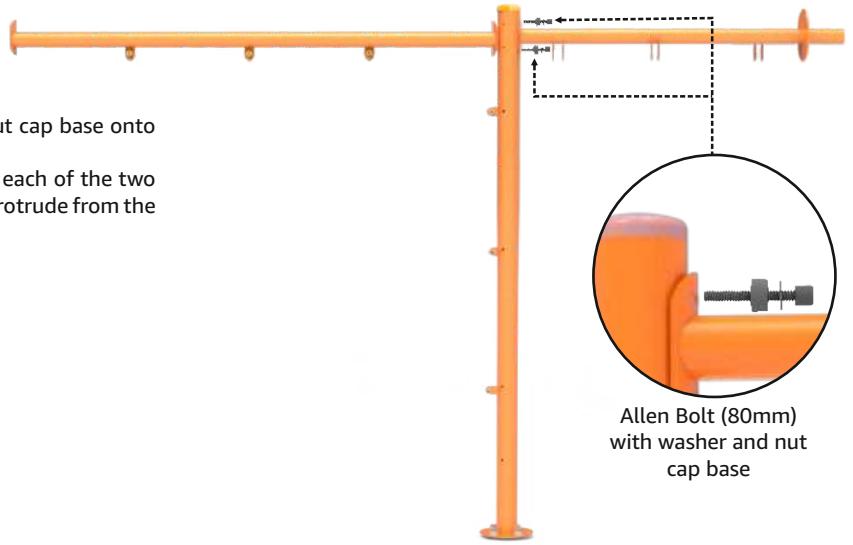

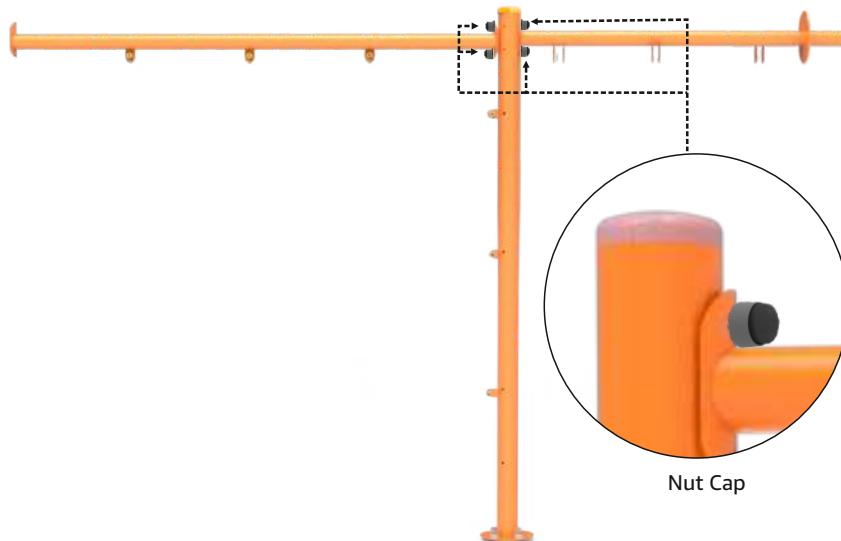


Put a nut cap on the head and the threaded end of each of the bolts.

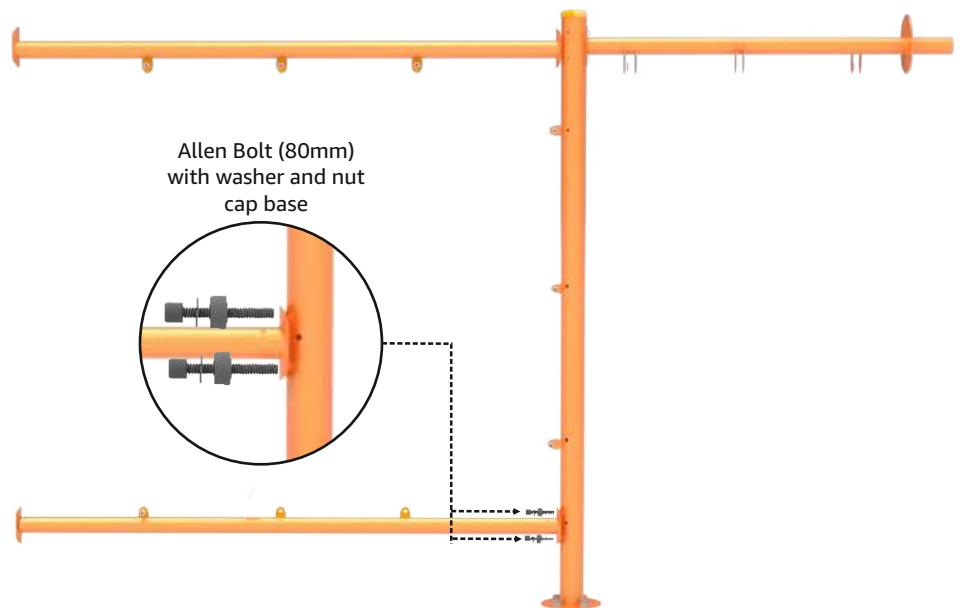

Take the other spider net bar and align the holes at its end with the hole at the lower section of the spider net vertical support bar.

Take two allen bolts (80mm) and put a washer and a nut cap base onto each of the two bolts.

Insert one bolt (with washer and nut cap base) through each of the two aligned hole pairs as shown in the image. The bolt ends protrudes from the other side of the spider net bar.


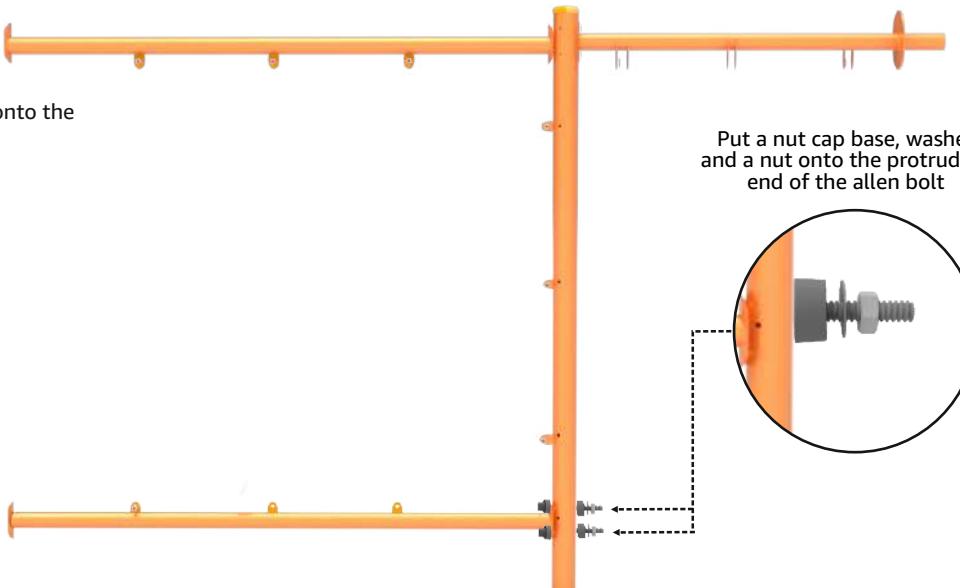


Put a nut cap base followed by a washer and a nut onto the protruding ends of both the bolts.


Put a nut cap base, washer and a nut onto the protruding end of the allen bolt

Tighten the bolts with the allen key. **Use the T handle to keep the nut stationary while you tighten the bolt.**

Tighten the bolt with allen key

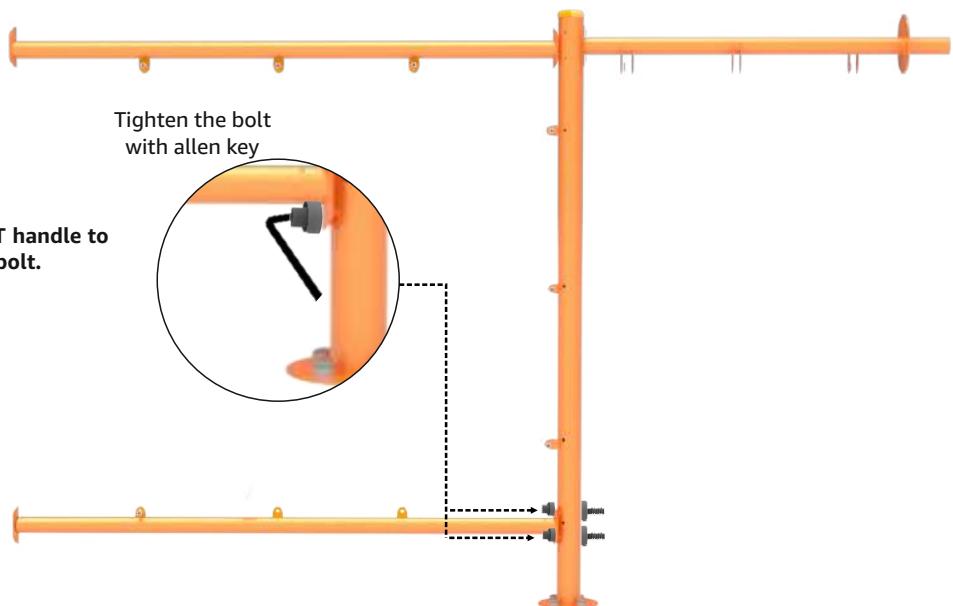


Put a nut cap on the head and the threaded end of each of the bolts.

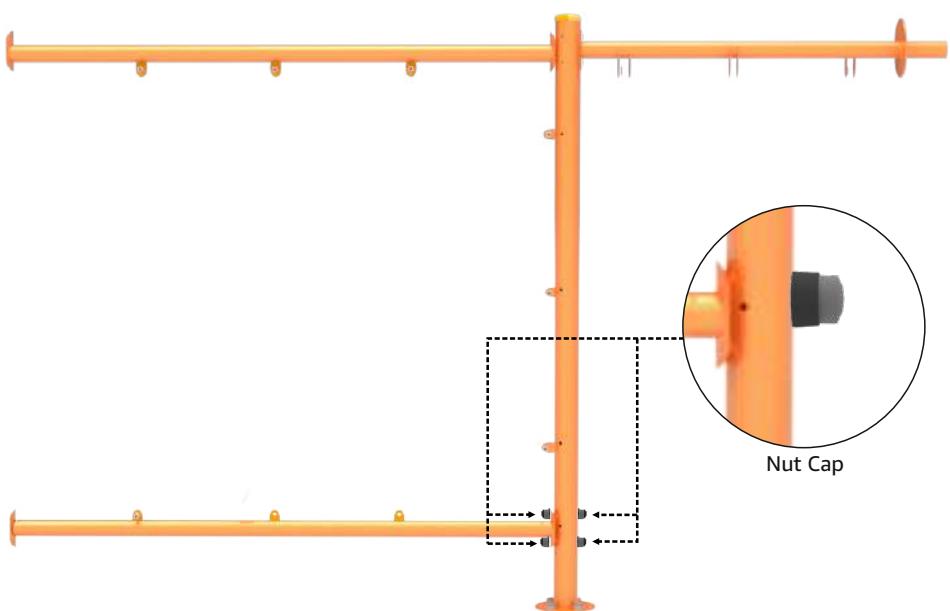


8


STEP

Required Assembly Parts

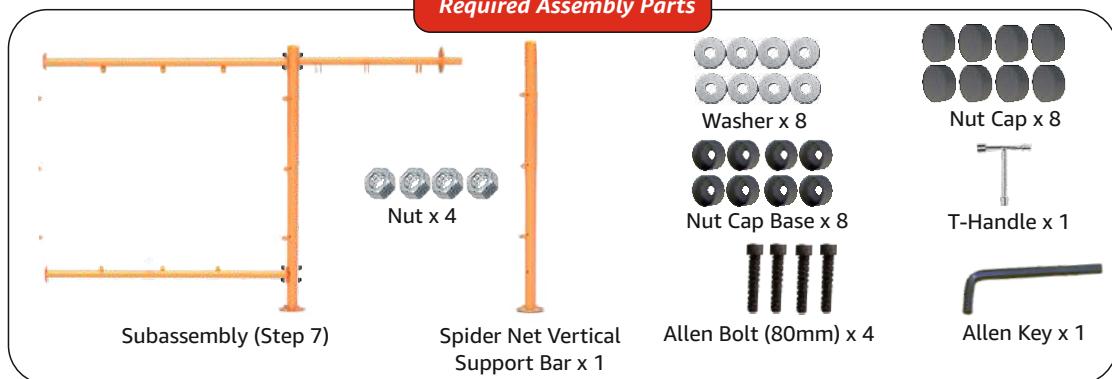

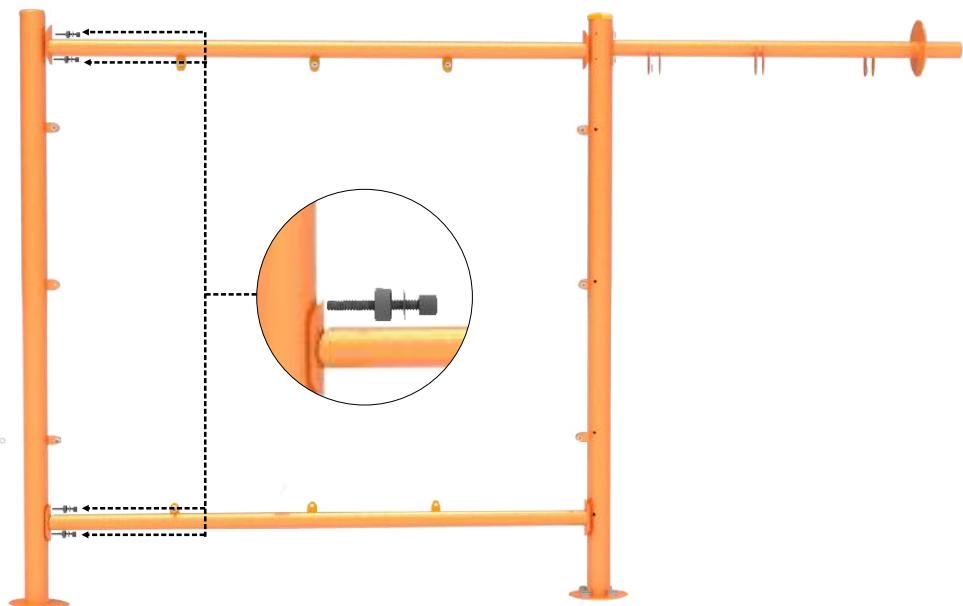


Take the one spider net vertical bar and align the holes at its top and lower section with the holes on the spider net bar of the subassembly (step 7). Take four 80mm allen bolts and put a washer and a nut cap base onto each bolt. Insert one bolt through each of the four aligned hole pairs as shown in the image above. The threaded end of each bolt will protrude from the opposite side of the spider net vertical bar.

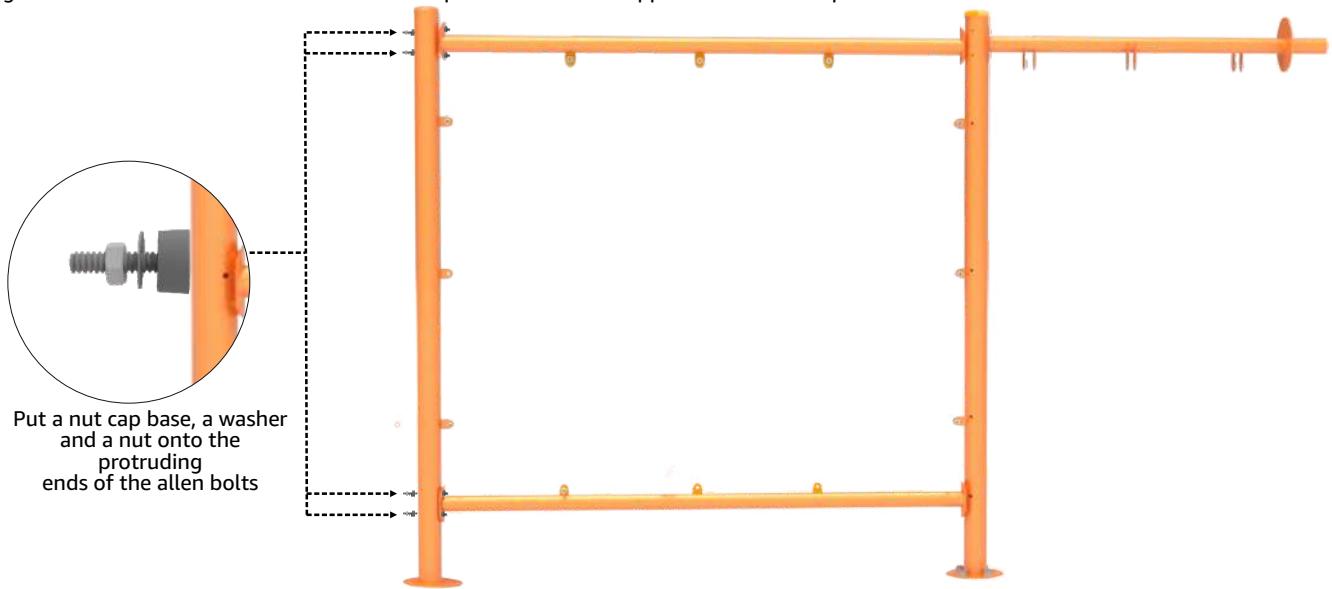


Put a nut cap base, a washer and a nut onto the protruding ends of the allen bolts

Put a nut cap base followed by a washer and a nut onto the protruding end of each of the four bolts as shown in the image above.

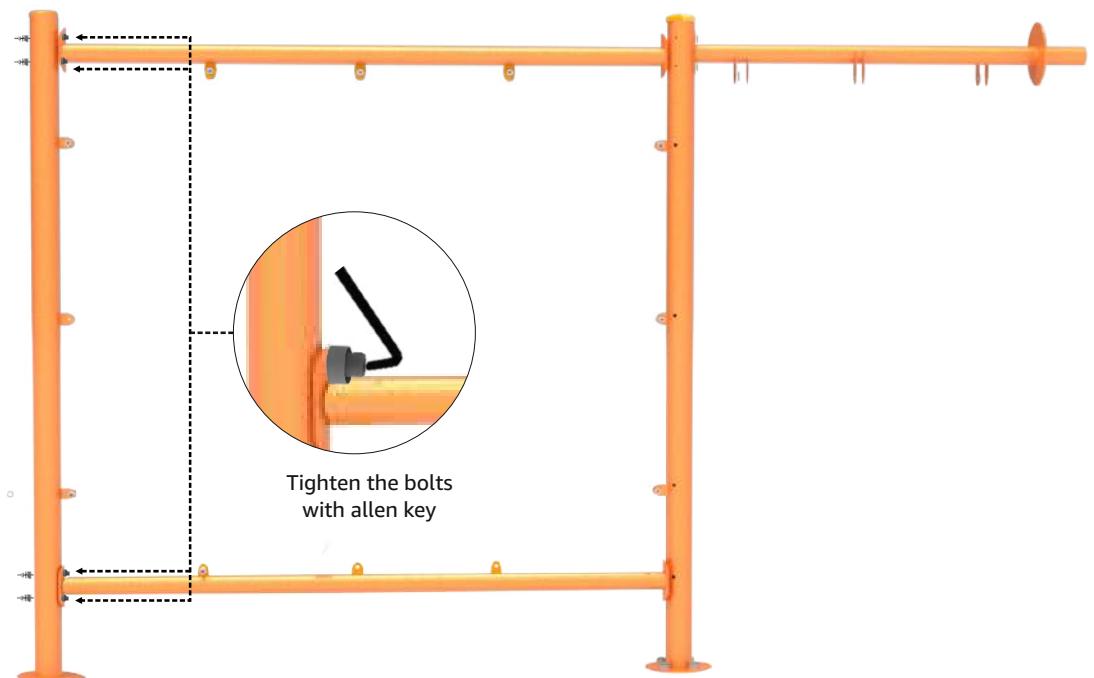


Tighten the bolts with allen key

Tighten the bolts with the allen key. **Use the T handle to keep the nut stationary while you tighten the bolt.**

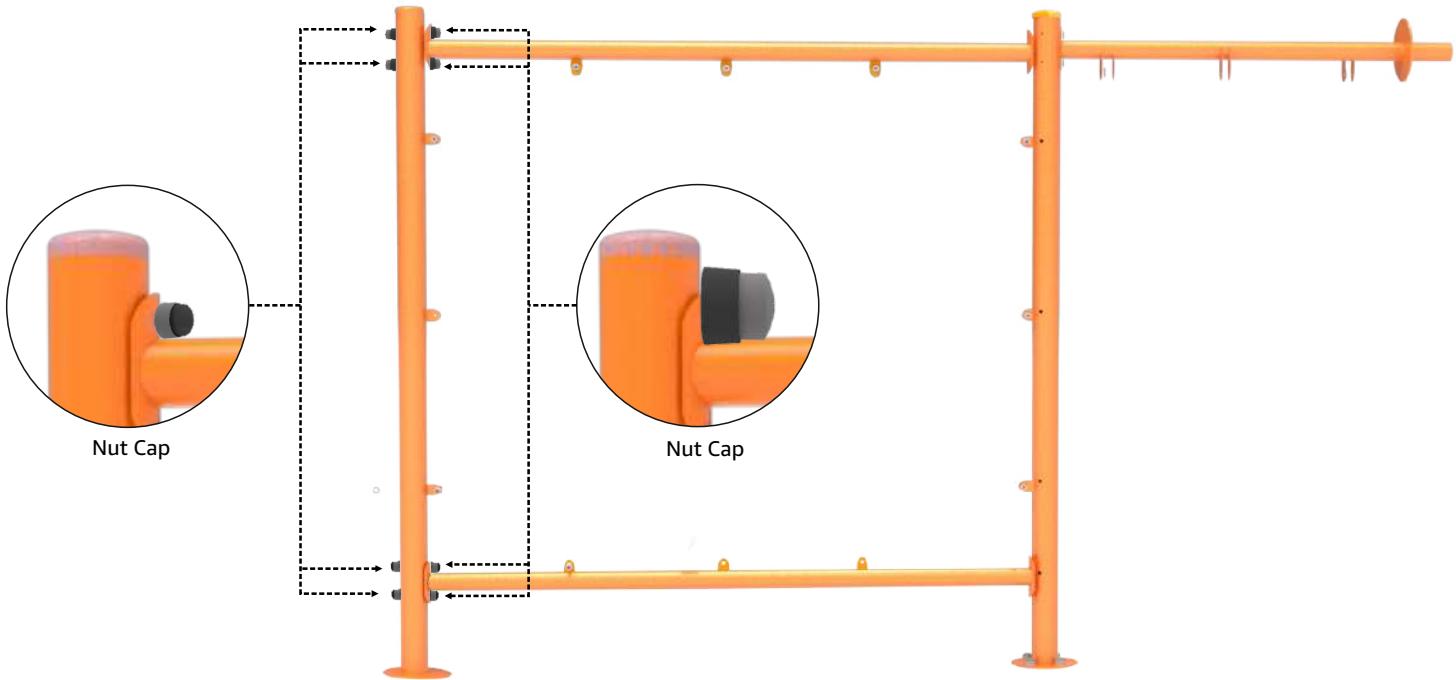

Put a nut cap on the head and the threaded end of each of the four bolts.

9 STEP



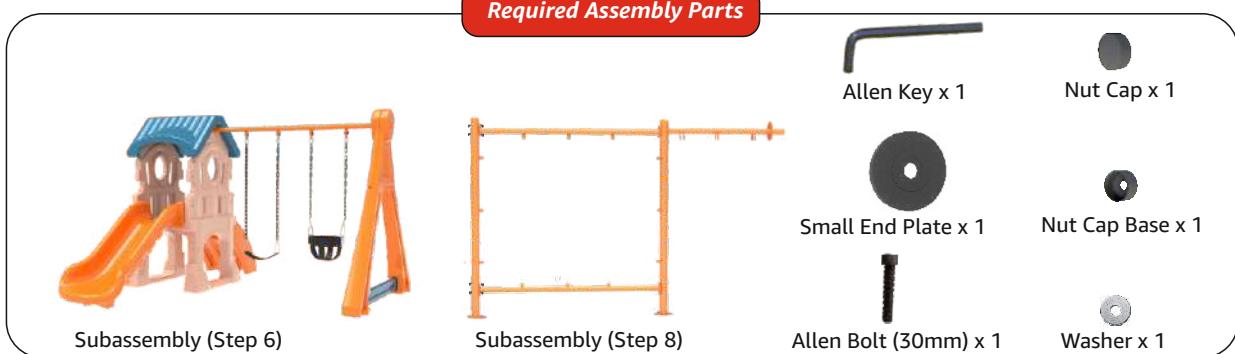


The open end of the ladder bar (subassembly - step 8) goes into the top hole (below roof) of the small castle (subassembly - step 6). The bar end should fit inside the hole and will be visible from inside the small castle.

Swing Bar End
(Inside the small
castle)




Small End Plate

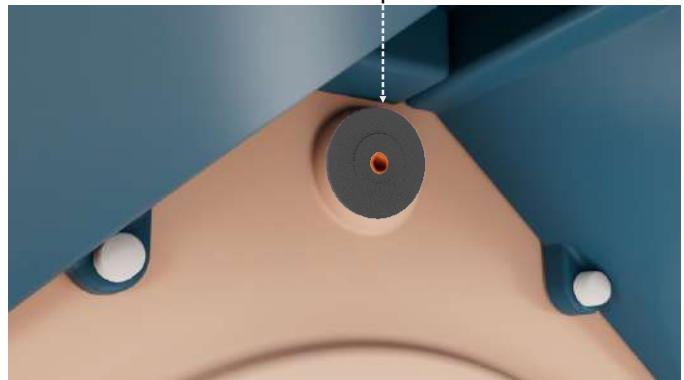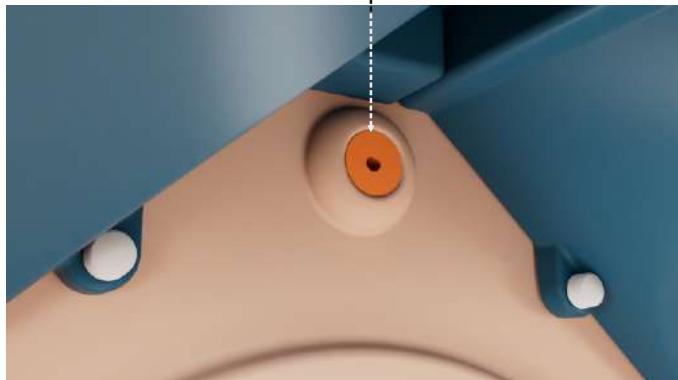


From inside the subassembly, align the hole at the centre of the end plate with the hole at the end of the ladder bar (inside the small castle).

30mm Allen bolt
with washer and
nut cap base

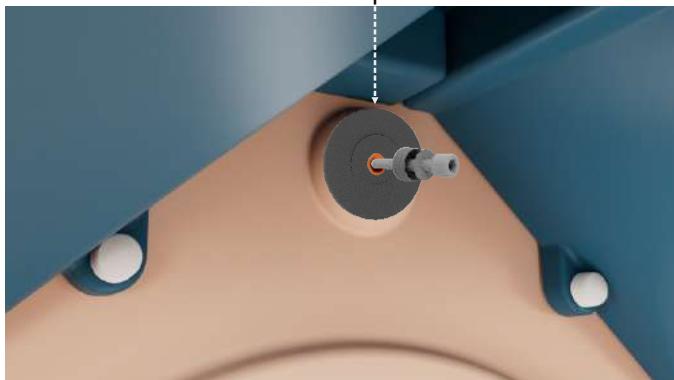


Tighten the bolt
with allen key

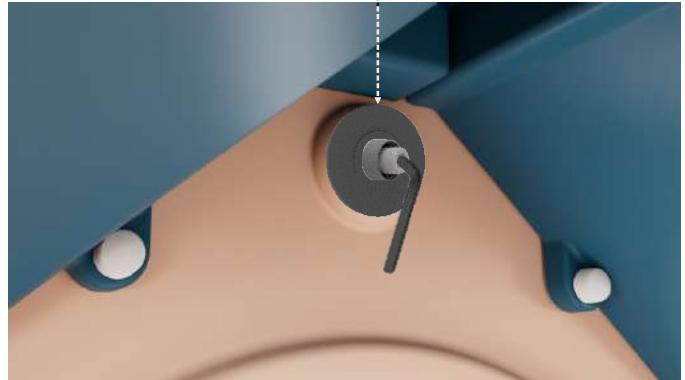


Take one 30mm allen bolt, put a washer and a nut cap base onto it. Insert the allen bolt into the aligned holes of the end plate and the ladder bar.

Tighten the bolt with the allen key.

Fix a nut cap onto the bolt head.

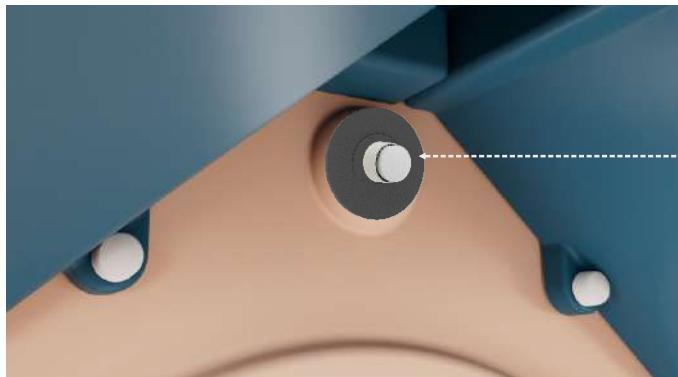

Nut Cap




10 STEP

Required Assembly Parts



Subassembly (Step 9)

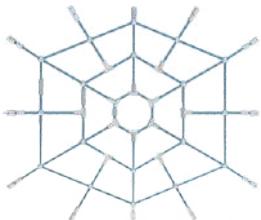

Spider Net x 1



Allen Key x 1




Nut x 12




T-Handle x 1



Allen Bolt (30mm) x 12



Allen Bolt (30mm)

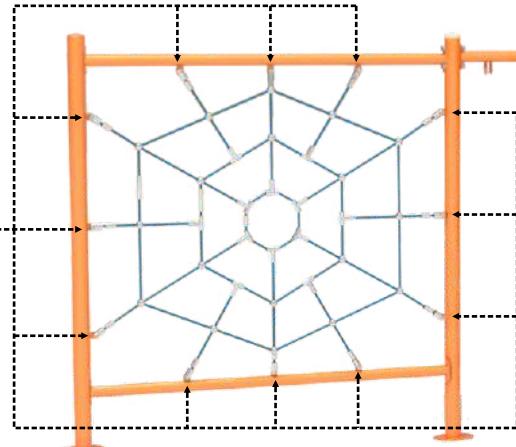

Take a spider net, align its mounting holes with the clamp holes on the spider net bars (subassembly - step 9). Insert one 30 mm bolt through each of the twelve aligned hole pairs. The bolt ends protrude from the other sides of the aligned hole pairs.


Put a nut onto the protruding end of the each bolt and tighten all the bolts one by one with the allen key. Use the T handle to keep the nut stationary while you tighten the bolt.

11 STEP

Required Assembly Parts



Subassembly (Step 10)

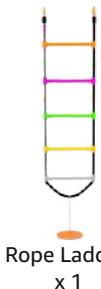

Rope Ladder x 1



T-Handle x 1



Nut x 2



Nut Cap x 4

Nut Cap Base x 4




Washer x 4




Allen Key x 1



Allen Bolt (50mm) x 2

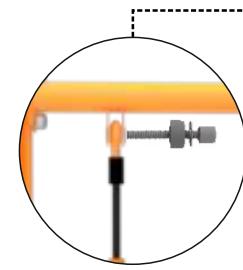


Allen Bolt (50mm) with Washer and Nut Cap Base

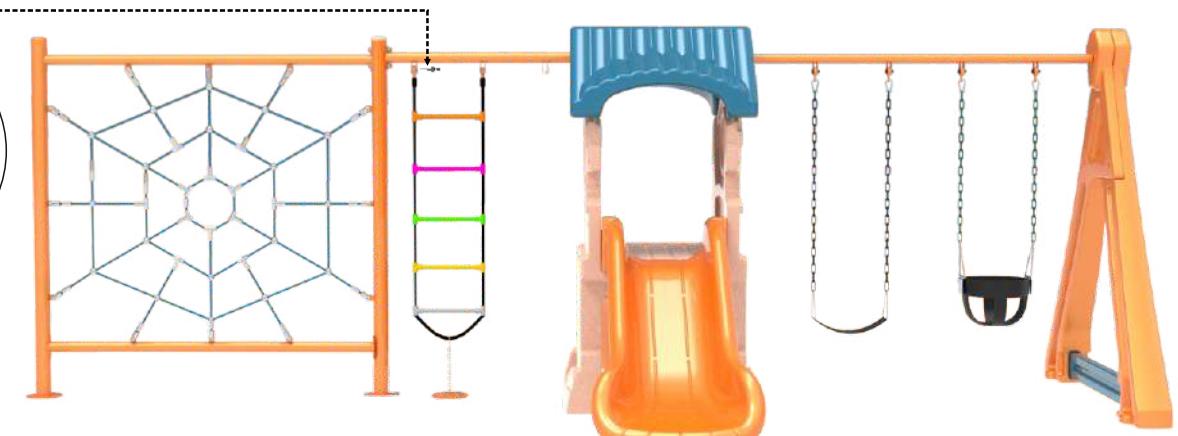


The ladder bar features three pairs of clamps - two pairs for securing the rope ladder and the remaining pair for rope climber. Take the rope ladder and align one of its mounting holes (at the top) with the corresponding clamp pair holes on the subassembly (step 10) as shown in the image.


Take one 50mm allen bolt and put a washer and a nut cap base onto it. Insert the allen bolt through the first clamp hole, then through the mounting hole of the rope ladder, and finally through the second clamp hole. The bolt end protrudes from the second clamp hole.

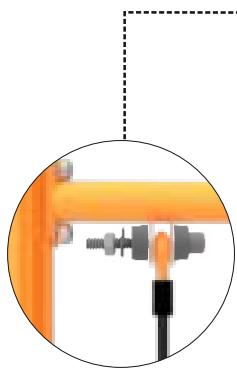


Put a nut cap base first and then a washer and a nut onto the protruding end of the bolt

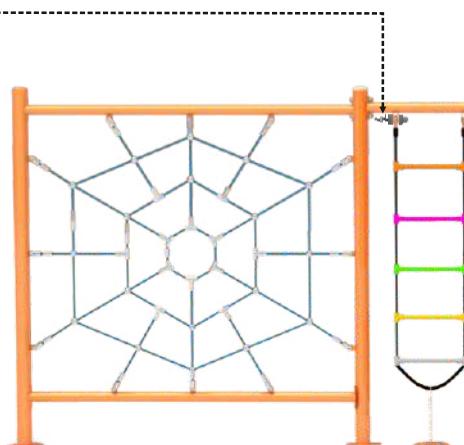


Put a nut cap base followed by a washer and a nut onto the protruding end of the allen bolt.

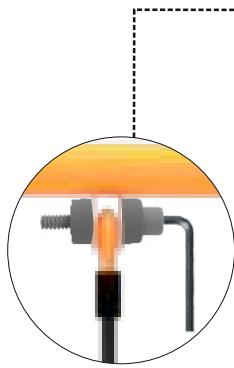


Tighten the bolt with allen key

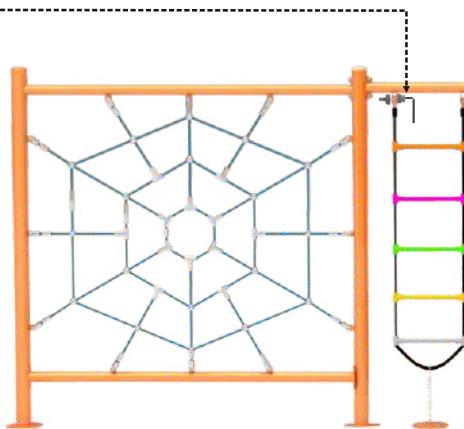

Tighten the allen bolt with the allen key. **Use the T handle to keep the nut stationary while you tighten the bolt.**

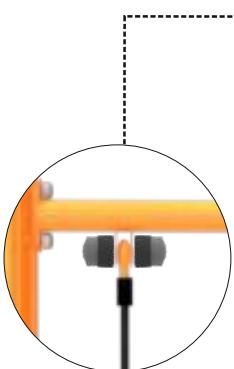

Nut Cap

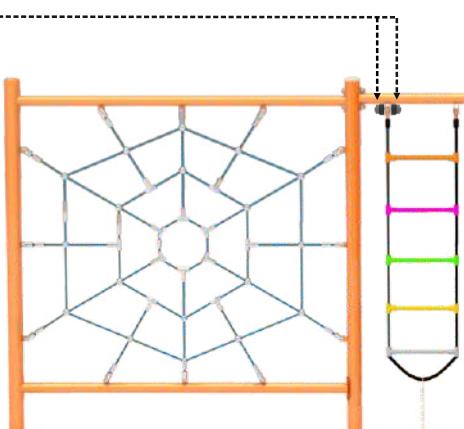

Secure a nut cap each onto the head and the protruding end of the allen bolt.




Repeat the sequence of actions mentioned in this step to secure the other mounting hole of the rope ladder to the rope ladder clamp.

12


STEP




Take the rope climber and align its mounting hole (at the top) with the corresponding clamp pair holes on the subassembly (step 11), as shown in the image.

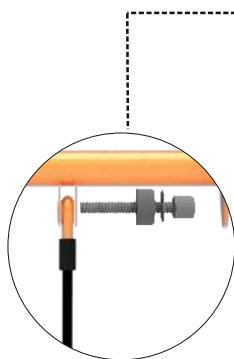


Allen Bolt (50mm)
with Washer and
Nut Cap Base

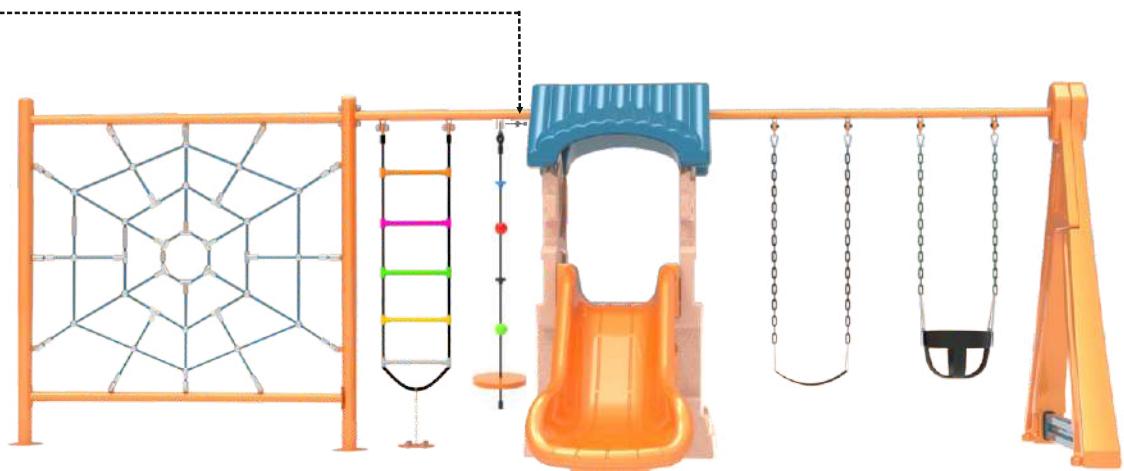


Take one 50mm allen bolt and put a washer and a nut cap base onto it. Insert the allen bolt through the first clamp hole, then through the mounting hole of the rope climber, and finally through the second clamp hole. The bolt end protrudes from the second clamp hole.

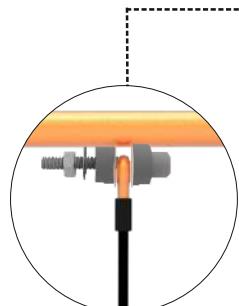

Put a nut cap base first
and then a washer and
a nut onto the bolt end

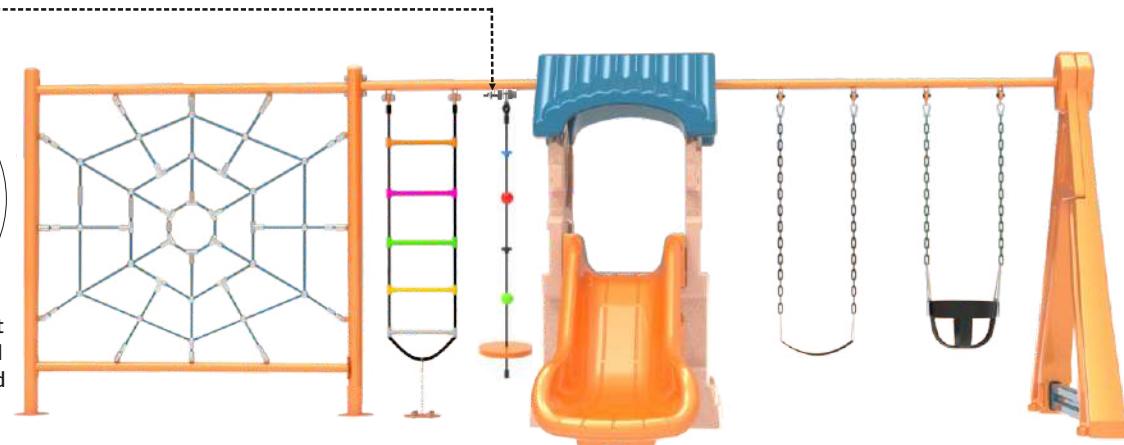


Put a nut cap base followed by a washer and a nut onto the protruding end of the allen bolt.

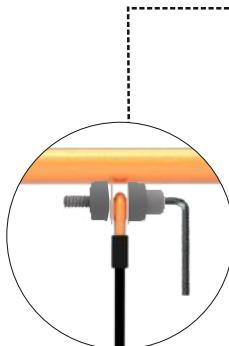

Tighten the bolt with
allen key



Tighten the allen bolt with the allen key. **Use the T handle to keep the nut stationary while you tighten the bolt.**

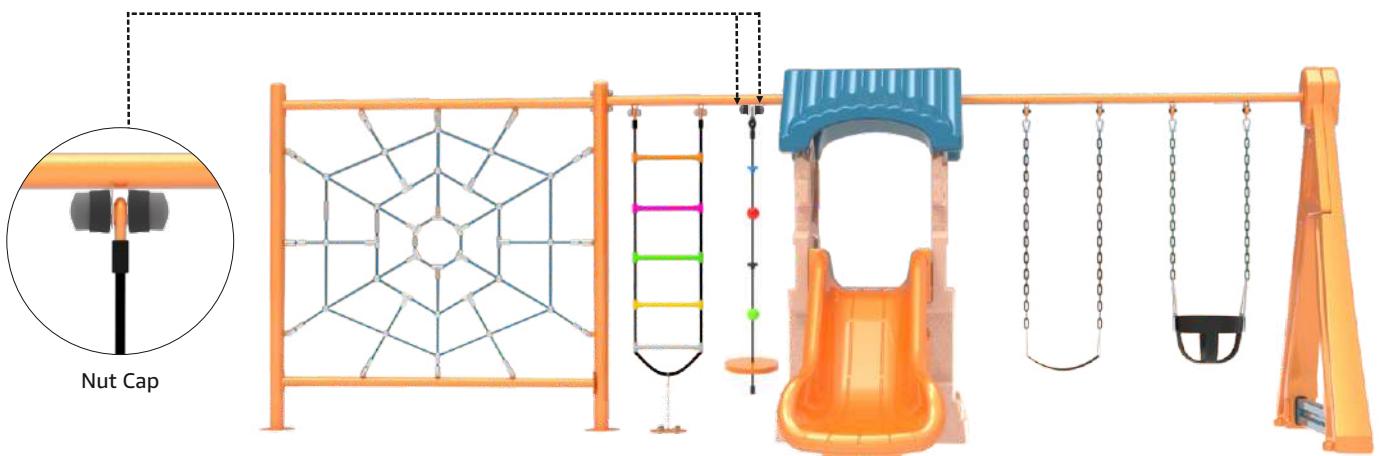

Fix a nut cap each onto the head and the protruding end of the allen bolt.

You Fantasy PlayCASTLE is now ready for use!

